
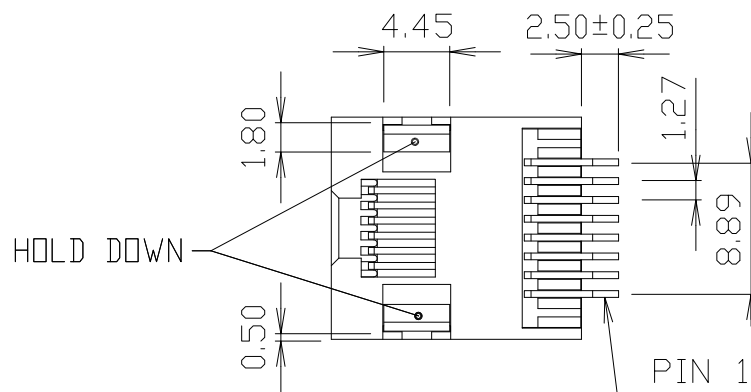


PCB LAYOUT
Ref.

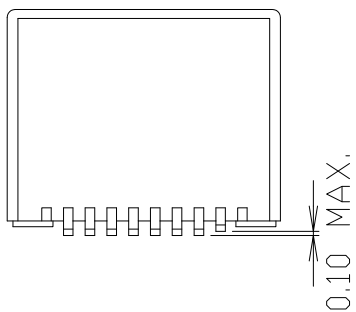

MATERIALS:

- HOUSING-PA9T GN2330
HEAT RESISTANT PLOYAMIDE RESIN
BLACK COLOR, UL94V-0
- OR-DSM STANYL TE250F6
HEAT DEFLECTION TEMP.290°
NONMETALLIC PEARL COLOR, UL94V-0
- CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD ON CONTACT AREA
AND GOLD FLASH IN SOLDER AREA.
- HOLD DOWN-0.30mm THICK COPPER ALLOY,
PLATED WITH TIN.

CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

REV.	ECN. NO.	DRAWN	DATE
A	NEW	JOHN	08/09/14

⊗:QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: 11JS70S-xxxxx		
APPROVED		.X± 0.38	X.'± 2'	TITLE:RJ45 1X1 TAB DOWN 8P8C		
CHECKED		.XX± 0.25	.X'± 1'	W/O LED,SHELL SMT TYPE		
DRAWN		.XXX± 0.13		UNIT: mm	SCALE: 1:1	SHEET: 1/1
						REV.: A

DST-conn Tech. Co., Ltd.



説明: △ :備註 ◇ :版本變更 ⑨ :尺寸序號 ■ :重點尺寸 ▼ :CPK尺寸

SIZE: A4