
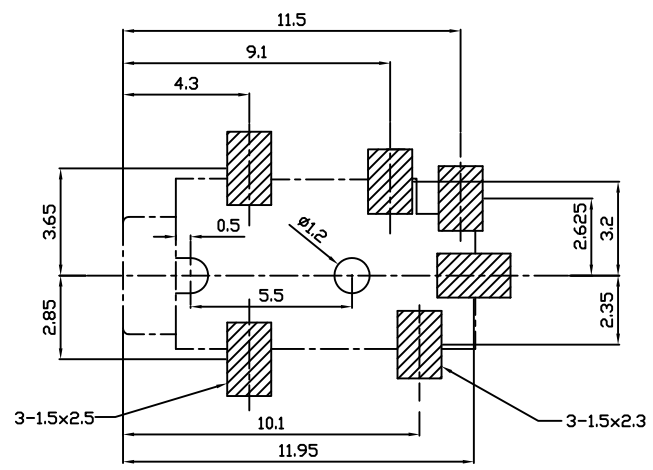
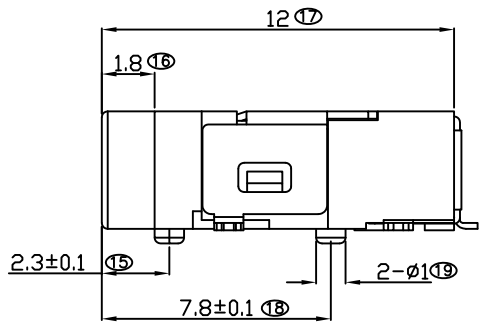
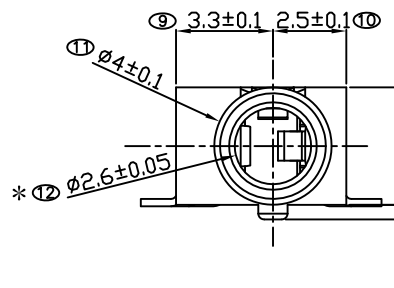
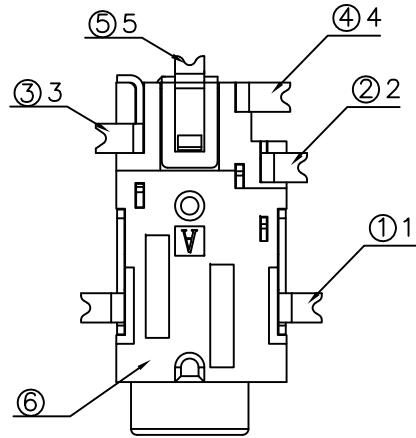




REV.	ECN NO.	DESCRIPTION	DESIGN	DATE
------	---------	-------------	--------	------

SPECIFICATIONS:

- ELECTRICAL CHARACTERISTICS:
 - RATING:
 - CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
 - INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC
- MECHANICAL CHARACTERISTICS:
 - INSERTION FORCE : 0.3~3.0 KGF
 - WITHDRAWAL FORCE : 0.3~3.0 KGF
- LIFE TEST: 5,000 CYCLES MIN.
- FOR REFLOW SOLDERING LEAD-FREE PROCESS.
- * REPRESENT CRITICAL DIMENSIONS.

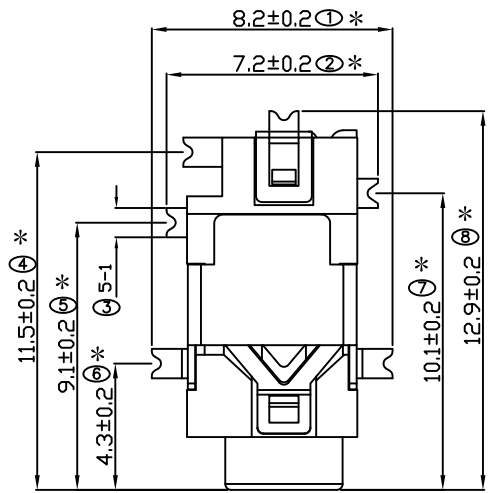

PCB LAYOUT

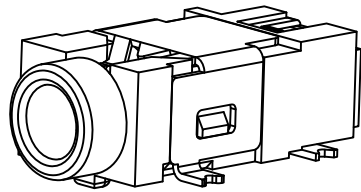

CIRCUIT DIAGRAM

NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
⑥	HOUSING	1	PA-9T (Black)	
⑤	TERMINAL 5	1	C2680R EH t=0.20	Au-Plated
④	TERMINAL 4	1	C2680R EH t=0.25	Au-Plated
③	TERMINAL 3	1	C5210R EH t=0.25	Au-Plated
②	TERMINAL 2	1	C5210R EH t=0.20	Au-Plated
①	TERMINAL 1	1	C5210R EH t=0.25	Au-Plated

UNLESS OTHERWISE SPECIFIED TOLERANCES

DST-conn Tech. Co., Ltd.

DECIMALS:	ANGLES:	DWG NO.	PART NAME:
DIM TOL	DIM TOL	DESIGN: Edwin.Hou 2010.11.2	PJ PHONE JACK
X. ±0.50	X. ±2'	CHECK:	PART NO. A22510S-3ADBAG
X.X ±0.30	X.X ±1'	APPROVED	REV. UNIT: SHEET: A mm 1/1
X.XX ±0.20	X.XX		
X.XXX ±0.10	X.XXX		