

SPECIFICATIONS:

1. ELECTRICAL CHARACTERISTICS:

- 1-1. RATING:
- 1-2. CONTACT RESISTANCE: 30mΩ MAX.(INITIAL)
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR ONE MINUTE
- 1-4. INSULATION RESISTANCE: 100MΩ MIN. MEASURED BY 500V DC








2. MECHANICAL CHARACTERISTICS:

- 2-1. INSERTION FORCE : 0.3~3.0 KGF
- 2-2. WITHDRAWAL FORCE : 0.3~3.0 KGF

3. LIFE TEST: 5,000 CYCLES MIN.

4. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

5. \* REPRESENT CRITICAL DIMENSIONS.

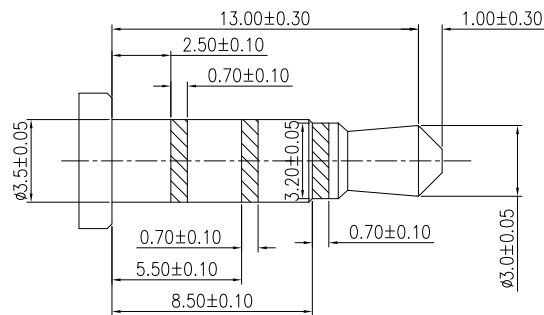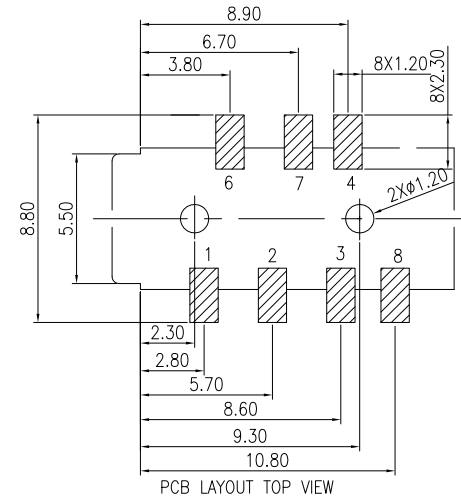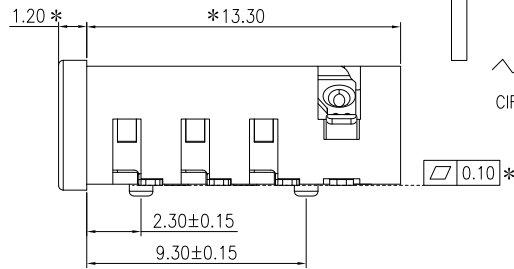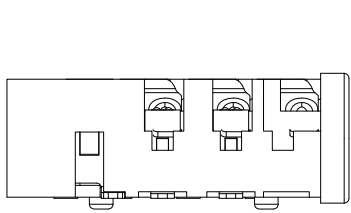

⑤	HOUSING	1	PA9T	Black
④	TERMINAL 4	1	PHOSPHOR BRONZE t=0.20	Ag-Plated
③	TERMINAL 3	2	PHOSPHOR BRONZE t=0.20	Ag-Plated
①	TERMINAL 1	4	PHOSPHOR BRONZE t=0.25	Ag-Plated
NO.	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

**DST**-conn Tech. Co., Ltd.

DECIMALS:		ANGLES:		DWG NO.		PART NAME:	
DIM	TOL	DIM	TOL	DESIGN:	Winky	EARPHOEN JACK	
X.	±0.50	X.	±2°	CHECK:	Roy	PART NO.	
X.X	±0.30	X.X	±1°	APPROVED	John	A33910S-4TDBNR	
X.XX	±0.20	X.XX	—		2015.01.09	REV.	UNIT: SHEET:
X.XXX	±0.10	X.XXX	—		2015.01.09	A	mm 1/1