

F

E

D

C

B

A

RoHS Compliant

SYMBOL

REV.

REVISION

APPROVAL

DATE

A

新版圖紙

John



2015/04/30

2.54\*No.of Positions±0.25

2.54\*No.of Contacts-2.54±0.25


2.540

PIN 0.64 SQ

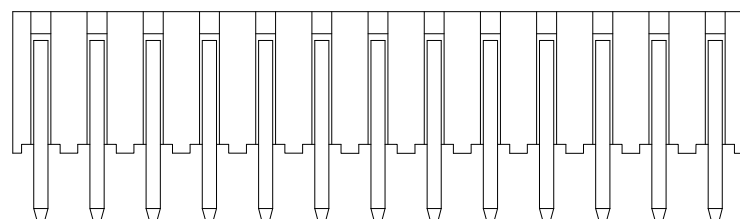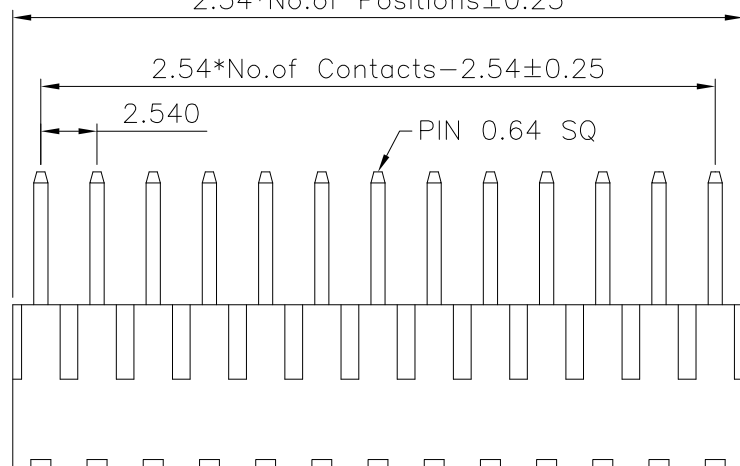

### Ordering Information

DH02-MG x xx GL54N

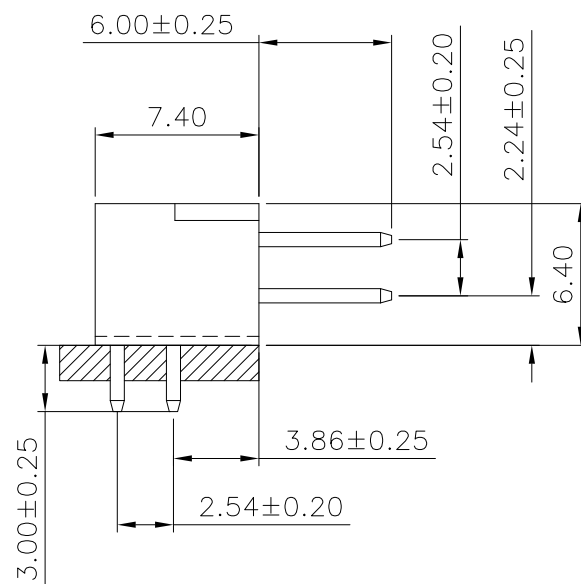No. of Pins per Row  
xx:02~40Contact Plating  
S: Tin  
O: Gold Flash  
Duplex plating  
G: Gold flash/Tin

### Specifications

Current Rating: 3Amp

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 600V AC

Contact Resistance: 20mΩ Max.

Operating Temperature: -40°C to +105°C


### Materials

Contact Material: Copper Alloy

Insulation Material: Polyester, UL 94V-0

P.B.T

All materials must be GP materials

Recommended P.C.Board  
Hole Layout

# DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME

2.54 PIN HEADER DUAL R/A TYPE

DRAWING

Winky

DWG. No.

DH02

PART NO.

DH02-MGxxxGL54N

CHECK

Roy

REV.

A

UNIT :  
mmTOLERANCE UNLESS  
OTHERWISE SPECIFIEDX. X  
X. XX  
X. XXX

ANGLE

±2°

APPROVAL

John

DATE

2015/04/30

SCALE

1:1

PAGE

1 OF 1

F

E

D

C

B

A