


RoHS Compliant

| SYMBOL | REV. | REVISION | APPROVAL | DATE         |
|--------|------|----------|----------|--------------|
|        | A    | 新版圖紙     | Winky    | 2014. 02. 01 |

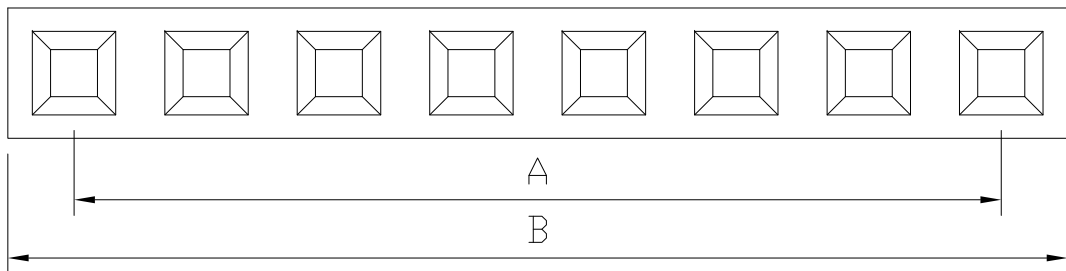




$A = 2.54 \times \text{No. of Contacts} - 2.54$   
 $B = 2.54 \times \text{No. of Contacts}$

**SPECIFICATIONS**

Current Rating : 3Amp  
 Insulator Resistance : 5000 Megoms min  
 Contacts resistance : 20 milliohms max  
 Dielectric Withsttoding : AC 500V  
 Operating Temperature : -40°C~+105°C  
 Conocl Material : Phosphor bronze  
 Insuiator Material : Polyester UL 94v-0  
 Standard : PA6T  
 PART NUMBER: DH05-FB0 xx x L54L

O:PE  
 E:TUBE  
 T:TRAY  
 G:BOX

xx: Number of contact

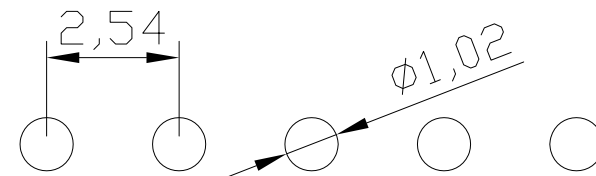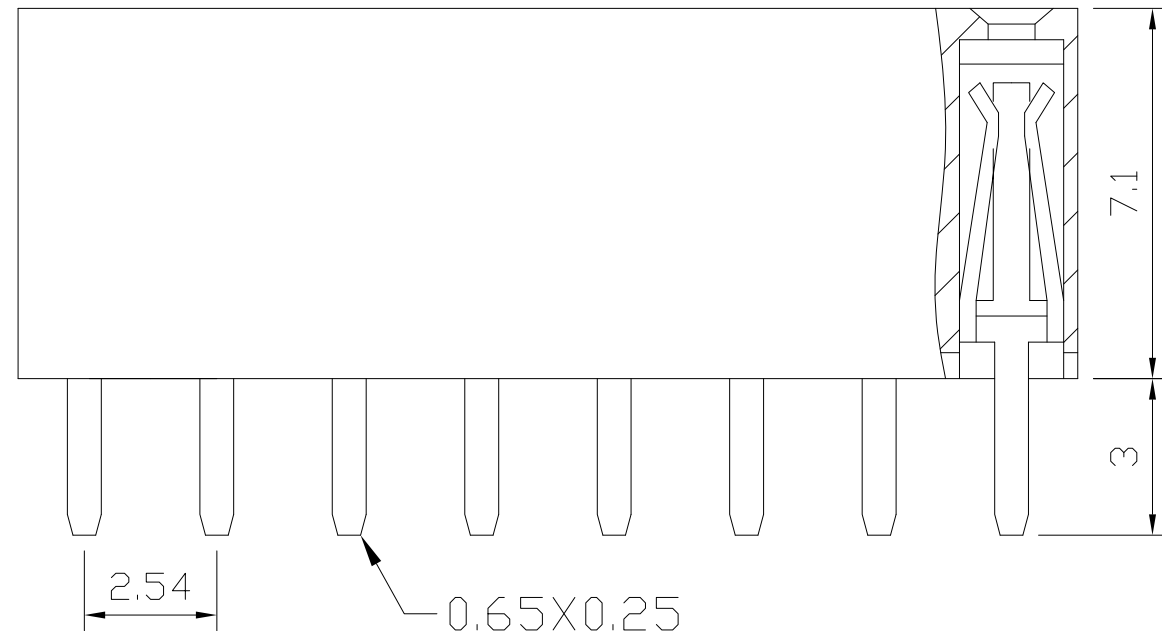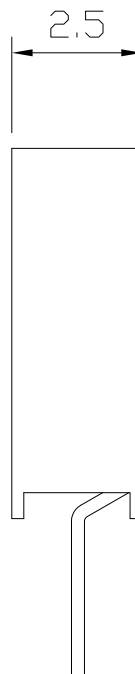

P. C. B LAYOUT

**DST**-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

|              |                                |   |            |              |          |          |        |
|--------------|--------------------------------|---|------------|--------------|----------|----------|--------|
| PART NAME    | FPH P2.54 H7.1 180° DIP SERIES |   |            | DRAWING      | Winky    | DWG. No. | DH05   |
|              | PART NO.                       | DH05-FB0xxxL54L                         |            |              | CHECK    | Roy      | REV.   |
| UNIT :<br>mm |                                | TOLERANCE UNLESS<br>OTHERWISE SPECIFIED | X. X ±0.30 | ANGLE<br>±2° | APPROVAL | John     | DATE   |
|              | X. XX ±0.20                    |   | SCALE      |              | 1:1      | PAGE     | 1 OF 1 |
|              |                                | X. XXX ±0.10                            |            |              |          |          |        |