

RoHS Compliant


SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	Winky	2013. 09. 04

PART NUMBER: DH06-F x 0 xx x L54L

C: CAP+ REEL
M: MYLAR + REEL
G: BOX T: TRAY

xx: Number of contact

B: PA6T C: PA9T(HF)
G: PBT E: LCP

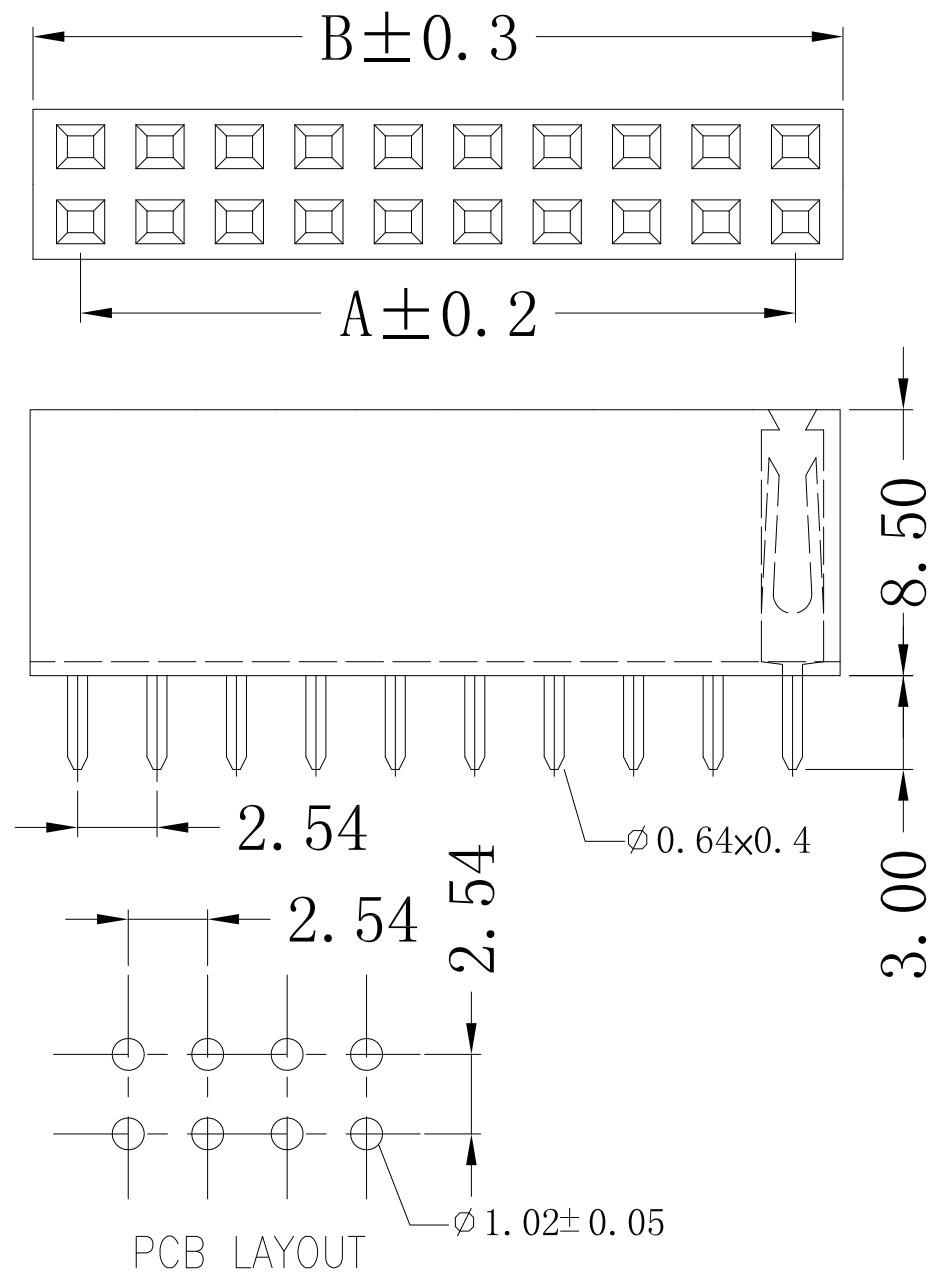

SPECIFICATIONS

Current Rating : 3Amp
 Insulator Resistance : 5000 Megoms min
 Contacts resistance : 20 milliohms max
 Dielectric Withsttonding : AC 500V
 Operating Temperature : -40°C~+105°C
 Conlocl Material : BRASS
 Insuiator Material : Polyester UL 94v-0
 Standard : Nylon-6T OR Nylon-9T OR PBT OR LCP

pin	A	B
2X2	2.54	5.58
2X3	5.08	8.12
2X4	7.62	10.66
2X5	10.16	13.20
2X6	12.70	15.74
2X7	15.24	18.28
2X8	17.78	20.82
2X9	20.32	23.36
2X10	22.86	25.90
2X11	25.40	28.44
2X12	27.94	30.98
2X13	30.48	33.52
2X14	33.02	36.06
2X15	35.56	38.60
2X16	38.10	41.14
2X17	40.64	43.68
2X18	43.18	46.22
2X19	45.72	48.76
2X20	48.26	51.30
2X21	50.80	53.84
2X22	53.34	56.38
2X23	55.88	58.92
2X24	58.42	61.46
2X25	60.96	64.00

DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	FPH P2.54 H8.5 180° DIP SERIES	DRAWING	Winky	DWG. No.	DH06
PART NO.	DH06-Fx0xxxL54L	CHECK	Roy	REV.	A
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ±0.30 X.XX ±0.20 X.XXX ±0.10	APPROVAL	John	DATE
		ANGLE ±2°	SCALE	1:1	PAGE

F E D C B A