




RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	Winky	2014. 02. 26


1

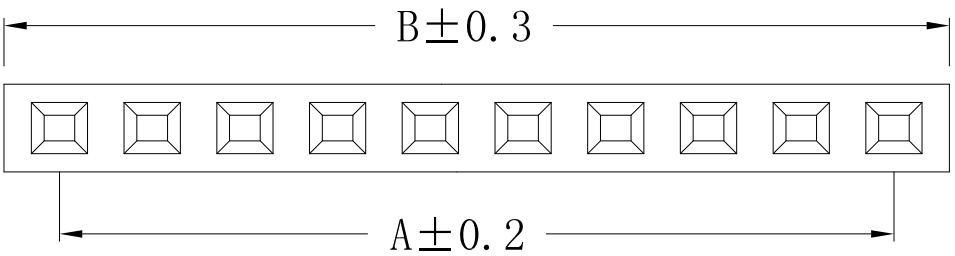

2

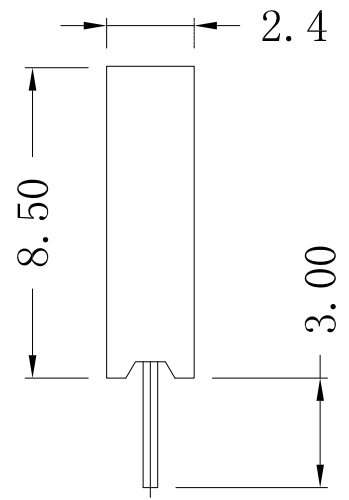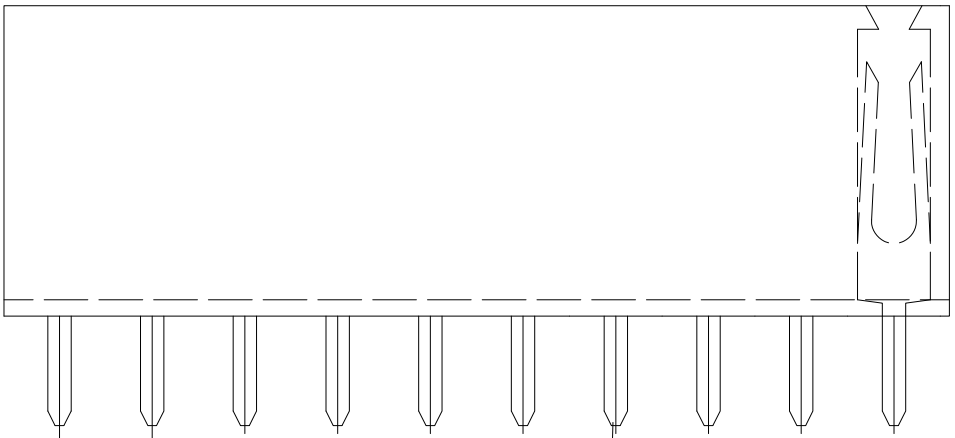

3

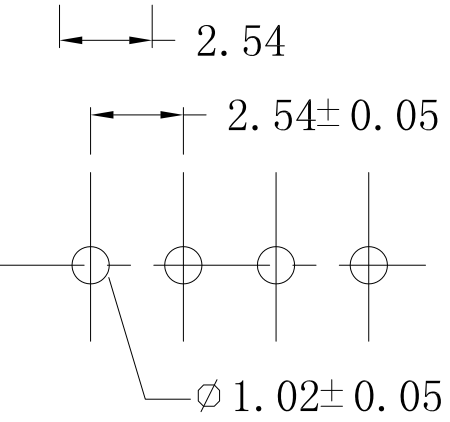

**SPECIFICATIONS**  
 Current Rating : 3Amp  
 Insulator Resistance : 5000 Megoms min  
 Contacts resistance : 20 milliohms max  
 Dielectric Withsttoding : AC 500V  
 Operating Temperature : -40°C~ +105°C  
 Conlcl Material : Phosphor bronze  
 Insuiator Material : Polyester UL 94v-0  
 Standard : P.B.T OR PA6T  
 PART NUMBER: DH08-F x 0 xx x L54L

0: STARDAND  
 C: CAP+REEL  
 xx: Number of contact  
 B: PA6T  
 G: PBT

pin	A	B
2	2.54	5.58
3	5.08	8.12
4	7.62	10.66
5	10.16	13.20
6	12.70	15.74
7	15.24	18.28
8	17.78	20.82
9	20.32	23.36
10	22.86	25.90
11	25.40	28.44
12	27.94	30.98
13	30.48	33.52
14	33.02	36.06
15	35.56	38.60
16	38.10	41.14
17	40.64	43.68
18	43.18	46.22
19	45.72	48.76
20	48.26	51.30
21	50.80	53.84
22	53.34	56.38
23	55.88	58.92
24	58.42	61.46
25	60.96	64.00

4

**DST-conn Tech. Co., Ltd.**

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	FPH P2.54 H8.5 180° DIP SERIES	DRAWING	Winky	DWG. No.	DH08	
PART NO.	DH08-Fx0xxxL54L	CHECK	Roy	REV.	A	
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X ±0.30	APPROVAL	John	DATE	2014. 02. 26
		X.XX ±0.20				
		X.XXX ±0.10				