
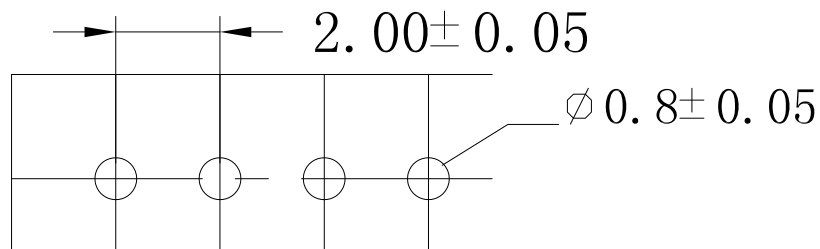
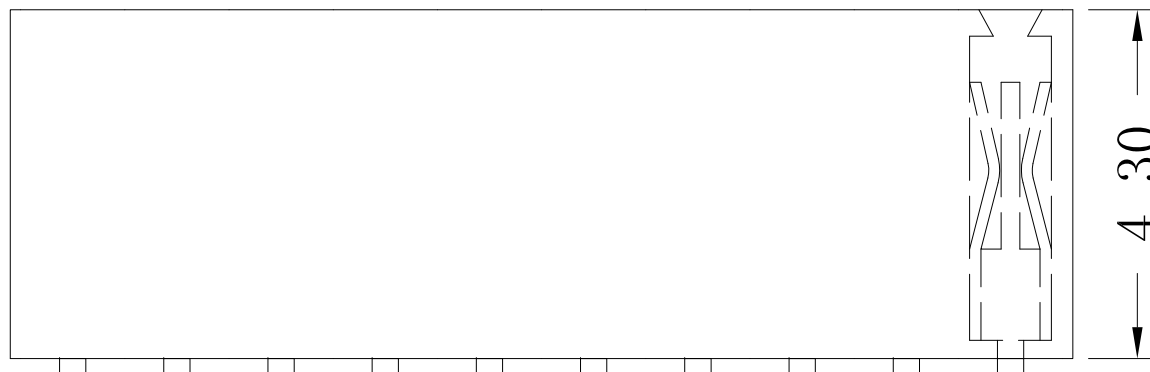


RoHS Compliant


SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	Winky	2013. 01. 10

SPECIFICATIONS

Current Rating : 2Amp
 Insulator Resistance : 5000 Megohms min
 Contacts resistance : 20 milliohms max
 Dielectric Withsttoding : AC 500V
 Operating Temperature : -40°C~+105°C
 Conocl Material : Phosphor bronze
 Insuiator Material : Polyester UL 94v-0
 Standard : PA6T

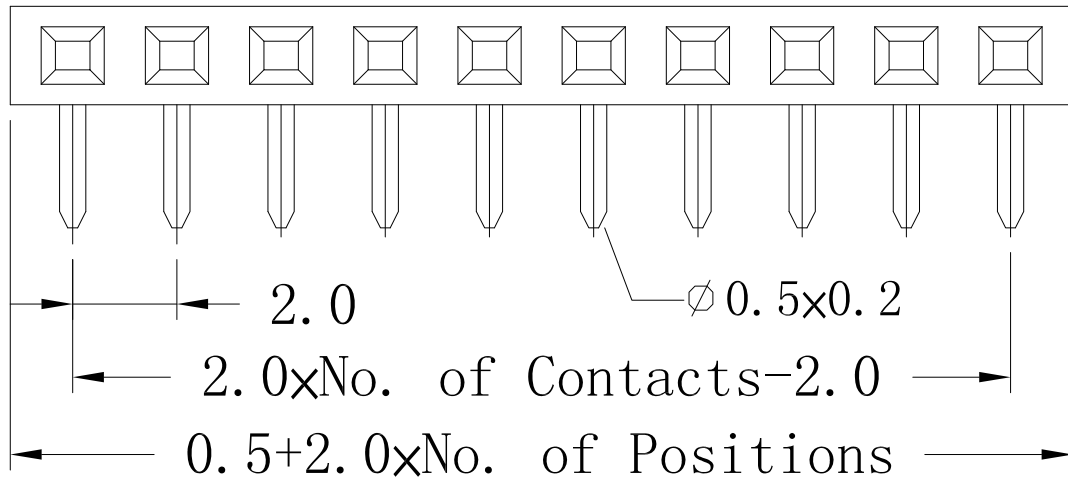

P.C.B. Hole Layout

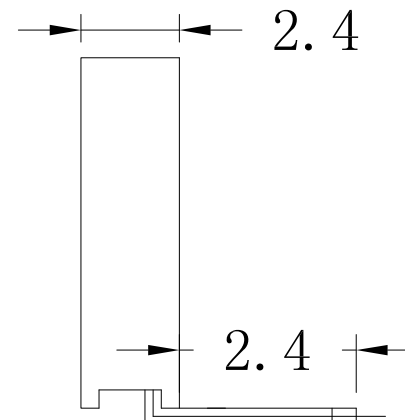

DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		FPH P2.0 90° DIP SINGA ROW SERIES		DRAWING	Winky	DWG. No.	DH09
PART NO.		DH09-FB0xx0L20L		CHECK	Roy	REV.	A
UNIT : mm	TOLERANCE UNLESS	X. X ±0.30	ANGLE	APPROVAL	John	DATE	2013. 01. 10
	OTHERWISE SPECIFIED	X. XX ±0.20 X. XXX ±0.10		±2°	SCALE	1:1	PAGE