

RoHS Compliant

SYMBOL

REV.

REVISION

APPROVAL

DATE

A

新版圖紙

Winky

2012. 08. 31

SPECIFICATIONS

CURRENT RATING:3.0A @80°C AMBIENT

OPERATING TEMP RANGE: -40°C TO +125°C

MAX PROCESSING TEMP:PA6T:260°C FOR 10

SECONDS PBT:200°C FOR 20 SECONDS

INSULATOR MATERIAL:PBT OR PA6T BLACK

CONTACT MATERIAL:BRASS

PLATING:GOLD FLASH OR OTHER




PART NUMBER: DH17-M x 0 xx 0L54L

pin	A	B
2	2.54	5.08
3	5.08	7.62
4	7.62	10.16
5	10.16	12.70
6	12.70	15.24
7	15.24	17.78
8	17.78	20.32
9	20.32	22.86
10	22.86	25.40
11	25.40	27.94
12	27.94	30.48
13	30.48	33.02
14	33.02	35.56
15	35.56	38.10
16	38.10	40.64
17	40.64	43.18
18	43.18	45.72
19	45.72	48.26
20	48.26	50.80
21	50.80	53.34
22	53.34	55.88
23	55.88	58.42
24	58.42	60.96
25	60.96	63.50
26	63.50	66.04
27	66.04	68.58
28	68.58	71.12
29	71.12	73.66
30	73.66	76.20
31	76.20	78.74
32	78.74	81.28
33	81.28	83.82
34	83.82	86.36
35	86.36	88.90
36	88.90	91.44
37	91.44	93.98
38	93.98	96.52
39	96.52	99.06
40	99.06	101.6

xx: NO. OF CONTACT

B: PA6T

G: PBT

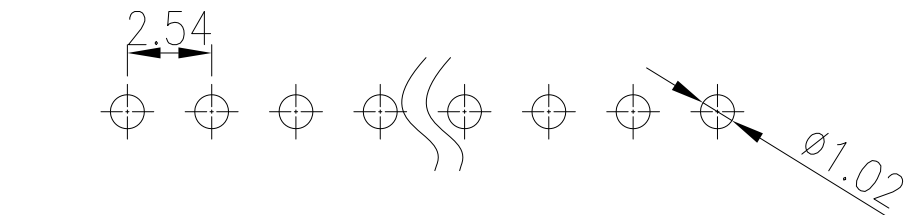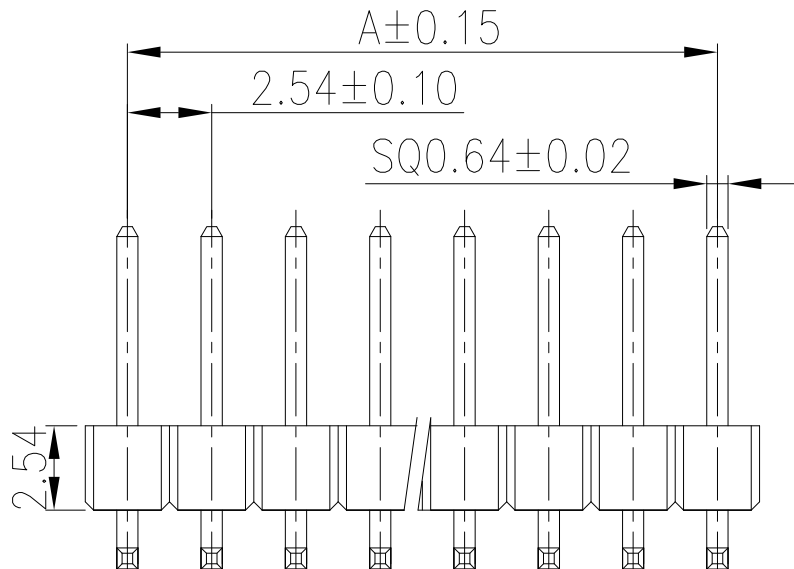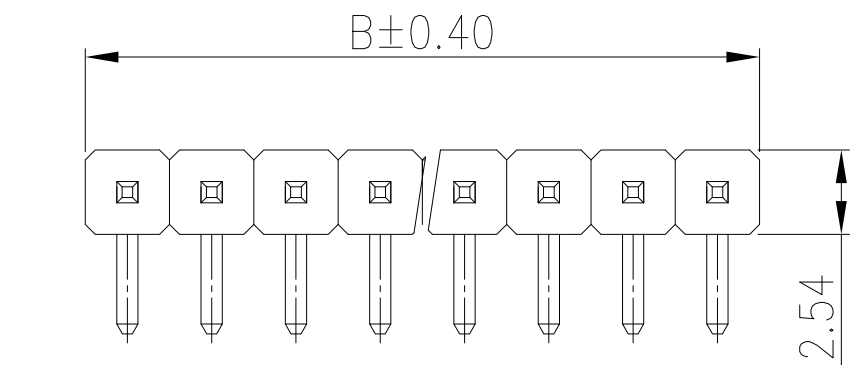

P. C. B LAYOUT

**DST**-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	PH P2.54 90° DIP SINGAL ROW	DRAWING	Winky	DWG. No.	DH17
PART NO.	DH17-Mx0xx0L54L	CHECK	Roy	REV.	A
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X. X ±0.30	APPROVAL	DATE	2012. 08. 31
		X. XX ±0.20			
		X. XXX ±0.10	SCALE	1:1	PAGE
		ANGLE ±2°			1 OF 1