
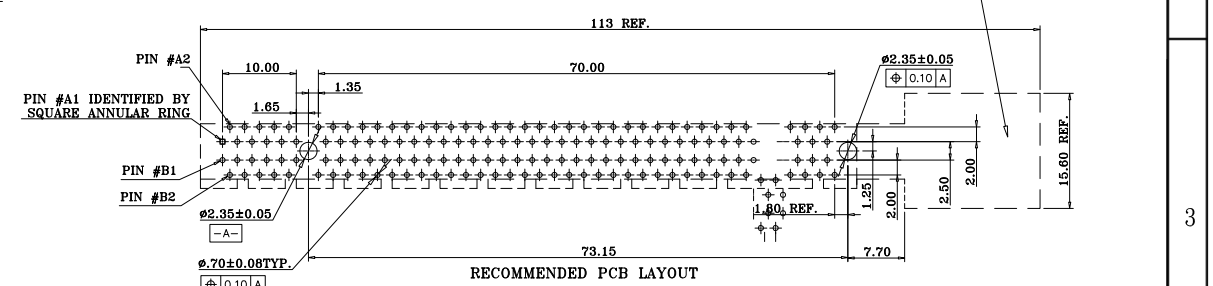
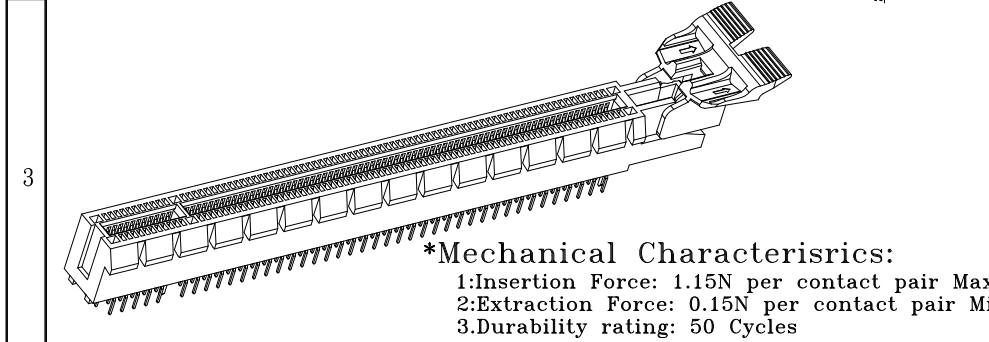
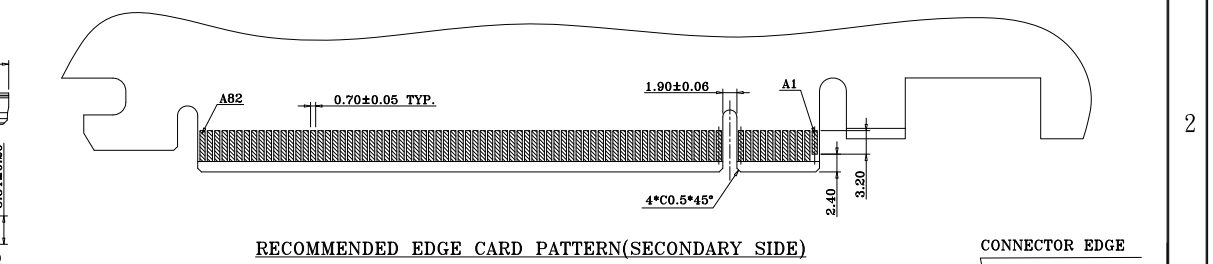
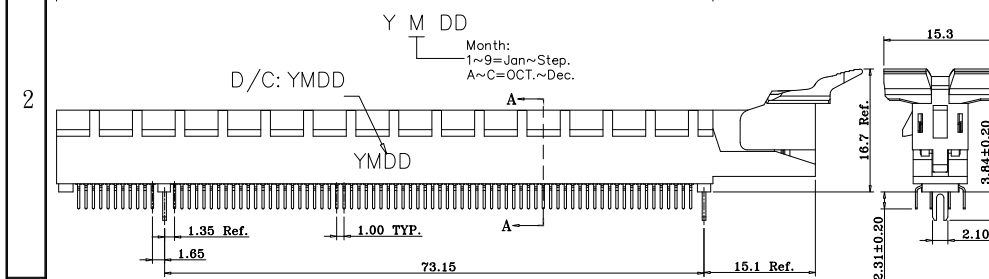
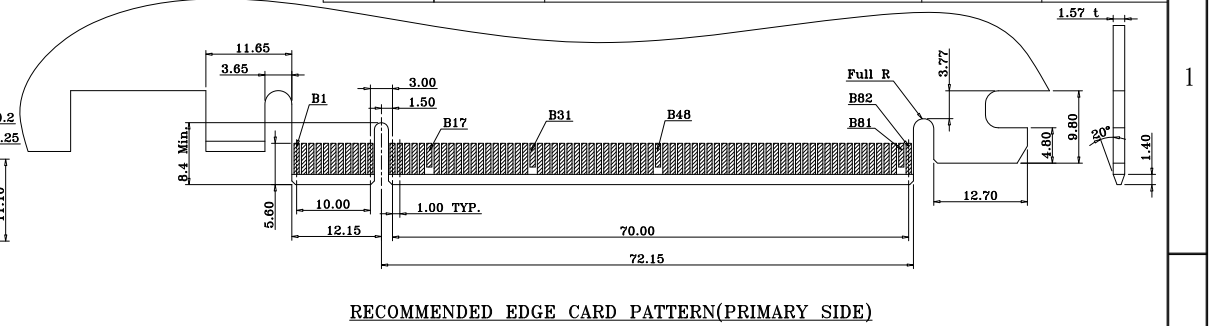


F	E	D	C	B	A
RoHS Compliant			SYMBOL	REV.	REVISION
				A	新版圖紙
					Winky
					2014. 10. 11

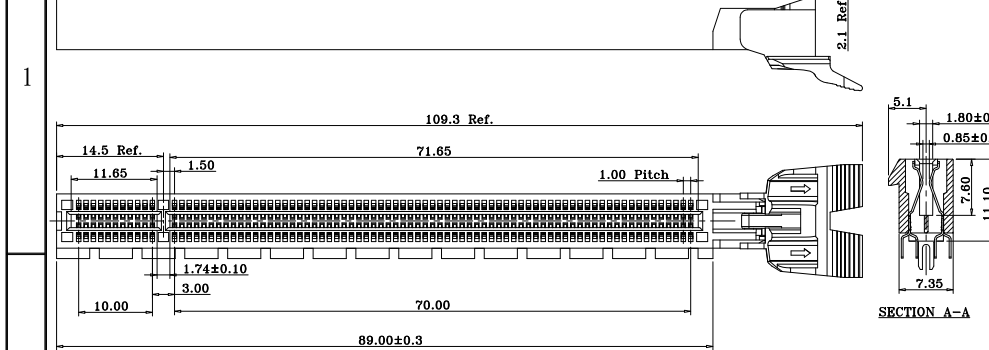

***Material:**
 1.Housing: PA66,UL-HB;
 2.Terminal: Copper Alloy,T=0.25mm;
 Plating: Gold in contact area;
 80u" Min Tin in solder area;
 30u" MIN.NICKEL UNDERPLATING OVER ALL.
 3.Fork: SPCC,NICKEL UNDERPLATING OVER ALL.

***Electrical Characteristics:**
 1:Contact Resistance: 30mΩ Max.
 2:Insulation Resistance: 1000MΩ Min.
 3:Dielectric Strength: 500V DC/1MIN.
 4.Contact Current rating: 1.1 A Per Pin Min.

ORDER INFORMATION:
 DI45-EVIxx164xxZ

Material: I: PA66


Color: R:Red, A:Orange, Y:Yellow, G:Green, E:Blue, C:Gray, B:Black, W:White

Environment Protection: L: RoHS, G: GP, H: Halogen-free

Packing: E: Tube, T: Tray, G: Box

164: No. of Pins

Plating: 0: Flash.Gold in contact area, 1: 3u" Min.Gold in contact area, 2: 5u" Min.Gold in contact area, 3: 10u" Min.Gold in contact area, 4: 15u" Min.Gold in contact area

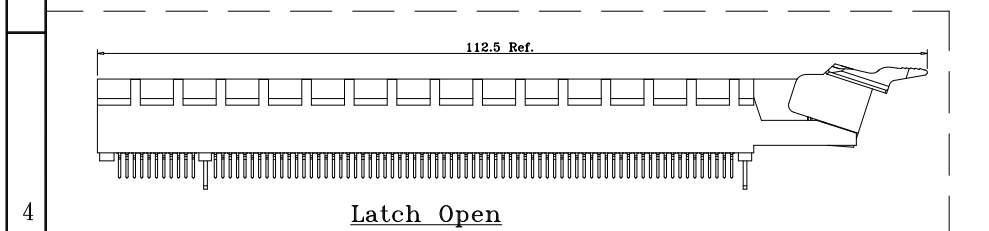

DST-conn Tech. Co., Ltd.		PART NAME	PC1e 164P Slot DIP type (无旋转式大耳扣)	DRAWING	Winky	DWG. No.	DI45
		PART NO.	DI45-EVIxx164xxZ	CHECK	Roy	REV.	A
		UNIT :	TOLERANCE UNLESS	ANGLE	John	DATE	2014. 10. 11
		mm	OTHERWISE SPECIFIED	±2°	SCALE	PAGE	1 OF 1
F	E	D	C	B	A		

COPYRIGHT RESERVED, PLEASE DO NOT COPY.