

RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	Winky	2011.03.15

NOTE:

- MATERIAL :
HOUSING : HIGH TEMPERATURE THERMOPLASTIC
UL94V-0, COLOR : SEE TABLE 1
TERMINAL(MAX): COPPER ALLOY, THICKNESS = 0.30 mm
TERMINAL(MIN): COPPER ALLOY, THICKNESS = 0.25 mm
FORKLOCK: COPPER ALLOY, THICKNESS = 0.30 mm
- PLATING:
CONTACT: GOLD OVER 50u" MIN NICKEL UNDERPLATE(SEE TABLE1)
SOLDER TAIL: 75u" MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE
GOLD SPECIFICATION: SEE TABLE 1
- ELECTRONICAL SPECIFICATION:
CURRENT RATING: 1.5 AMPERE PER CONTACT
CONTACT RESISTANCE: 30 MILLIOHMS MAX.
INSULATION RESISTANCE: 1000 MEGOHMS MIN.
DIELECTRIC WITHSTANDING VOLTAGE: 500 VDC.
OPERATING TEMPERATURE: -20°C~+85°C
- MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT(ROHS)

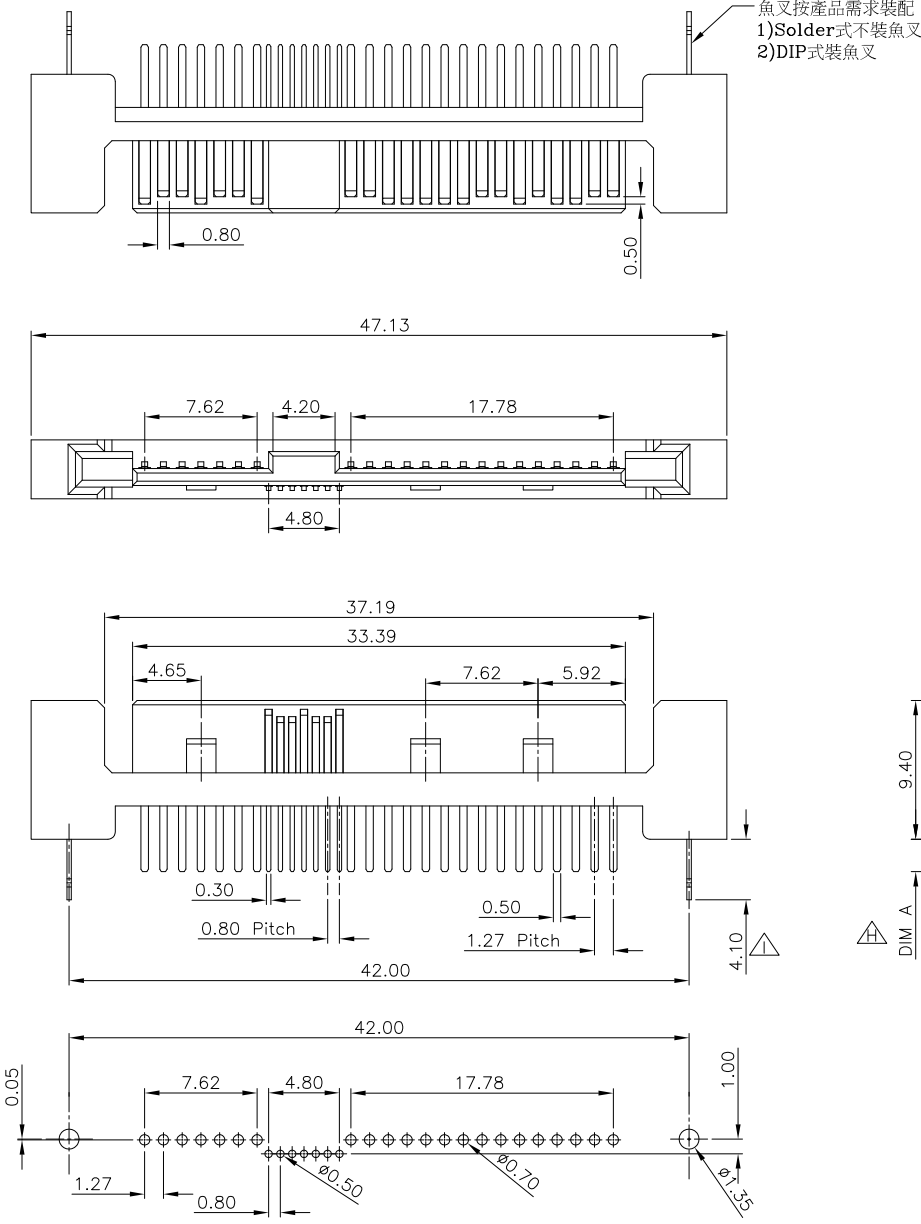


TABLE 1

DS08-VG429TL94SK1(DIP)	15 U" GOLD	BLACK	3.00
DS08-VG529TL94SK2(DIP)	30 U" GOLD	BLACK	2.20
DS08-VG429TL94SK2(DIP)	15 U" GOLD	BLACK	2.20
DS08-VG029TL94SK2(DIP)	GOLD FLASH	BLACK	2.20
DS08-VG529TL94SK2(Solder)	30 U" GOLD	BLACK	2.20
DS08-VG429TL94SK2(Solder)	15 U" GOLD	BLACK	2.20
DS08-VG029TL94SK2(Solder)	GOLD FLASH	BLACK	2.20

RECOMMENDED PCB LAYOUT

DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	SAS 29P HEADER Vertical	DIP	SAS 29P HEADER Vertical	Solder	DRAWING	Winky	DWG.No.	DS08
PART NO.	DS08-VGx29TL94SKx				CHECK	Roy	REV.	A
UNIT :	TOLERANCE UNLESS	X.X ±0.30	ANGLE	APPROVAL	John	DATE	2011.03.15	
mm	OTHERWISE SPECIFIED	X.XX ±0.25	±3°	SCALE	1:1	PAGE	1 OF 1	
		X.XXX ±0.15						