



RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	Winky	2007. 10. 26

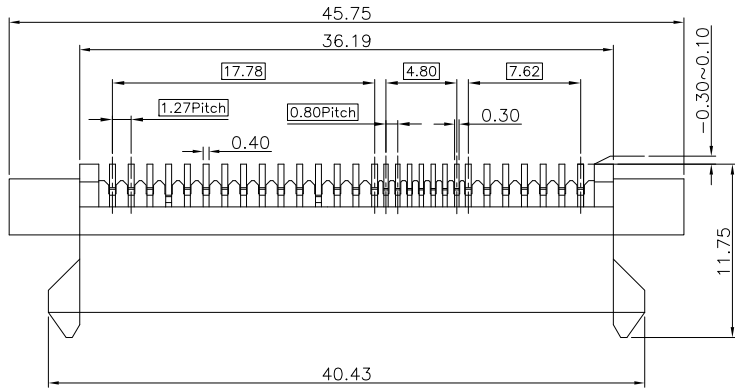

NOTE:

- MATERIAL :  
 BASE : High Temperature Thermoplastic  
 UL94V-0, COLOR : BLACK  
 TERMINAL(max): Copper Alloy, THICKNESS = 0.30 mm  
 TERMINAL(min): Copper Alloy, THICKNESS = 0.25 mm  
 FORKLOCK: Copper Alloy, THICKNESS = 0.30 mm





2, PLATING:

- CONTACT: GOLD OVER 50u" MIN NICKEL UNDERPLATE (SEE TABLE)
- SOLDER TAIL: 150u" MIN MISTY TIN 50u" MIN NICKEL UNDERPLATE
- GOLD SPECIFICATION: SEE TABLE

3. ELECTRICAL SPECIFICATION:

- CURRENT RATING: 1.5 AMPERE PER CONTACT
- CONTACT RESISTANCE: 30 MILLIOHMS MAX.
- INSULATION RESISTANCE: 1000 MEGOHMS MIN.
- DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.
- OPERATING TEMPERATURE: -20°C ~ +85°C

4. MEETS THE REQUIREMENTS OF DIRECTIVE 2002/95/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL OF 27 JANUARY 2003 ON THE RESTRICTION OF THE USE OF CERTAIN HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC

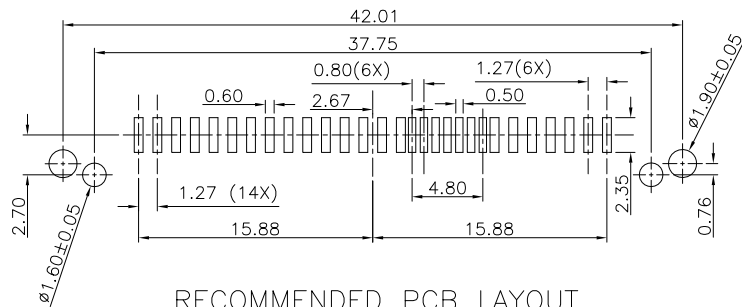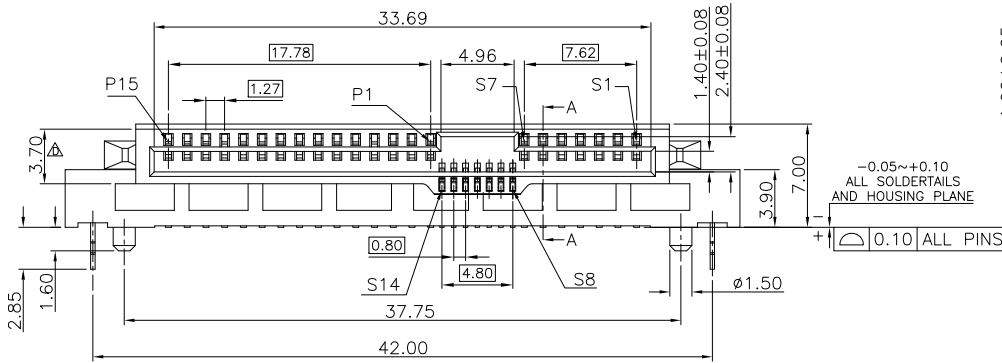

TABLE

DS09-MD029TL66SK	GOLD FLASH	PA9T BLACK
DS09-MD429TL66SK	15 U" GOLD	PA9T BLACK
DS09-ME029TL66SK	GOLD FLASH	LCP BLACK
DS09-ME429TL66SK	15 U" GOLD	LCP BLACK
PART NO.	PLATED	COLOR FOR THE PLASTIC

**DST-conn Tech. Co., Ltd.**

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		ASSEMBLY OF SAS 29P SOCKET R/A SMT TOP WITHOUT BULG		DRAWING		Winky		DWG.No.		DS09	
PART NO.		DS09-Mxx29TL66SK		CHECK		Roy		REV.		A	
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED		X.X ±0.20	ANGLE	APPROVAL		John		DATE		2007. 10. 26
			X.XX ±0.15		SCALE		1:1		PAGE		1 OF 1
		X.XXX ±0.10									