
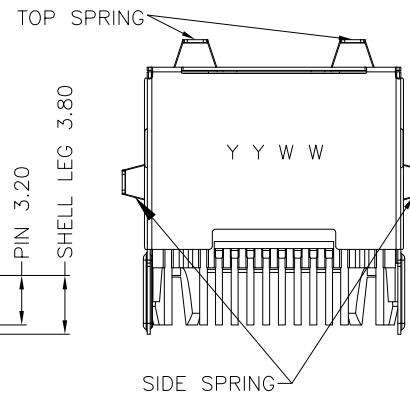
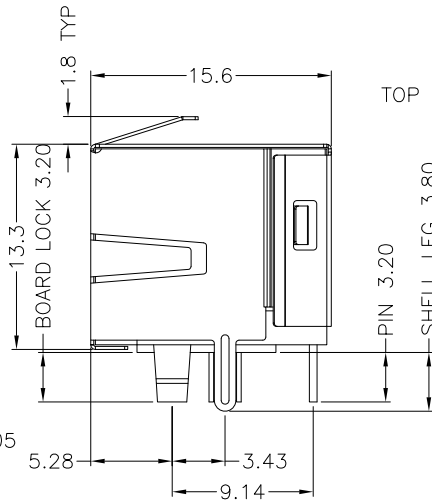


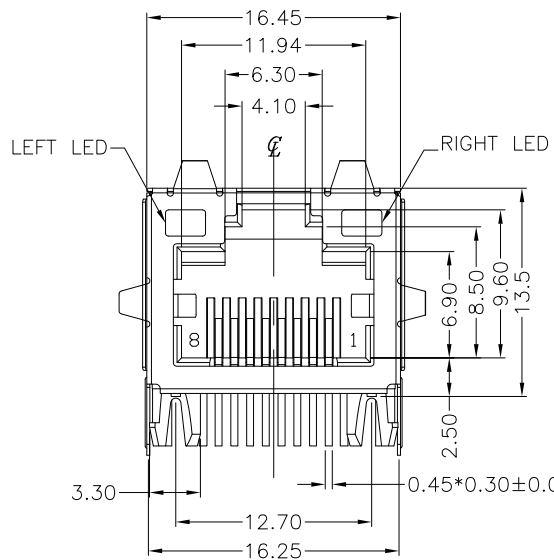


LEFT LED:



RIGHT LED:

L4 +  - L3

L2 +  - L1

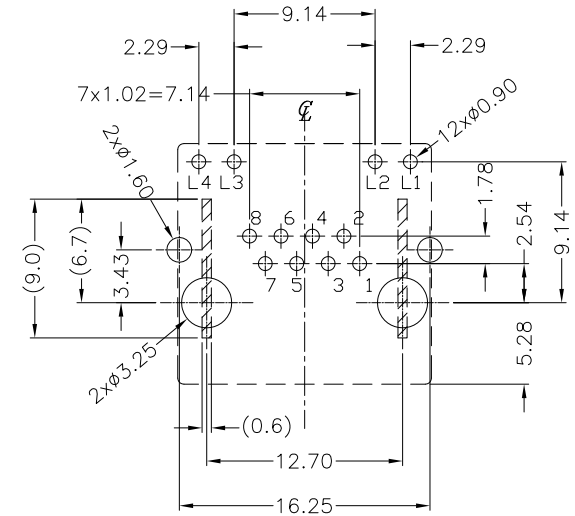

RECOMMENED PCB LAYOUT
COMPONENT SIDE
TOLERANCE ± 0.05

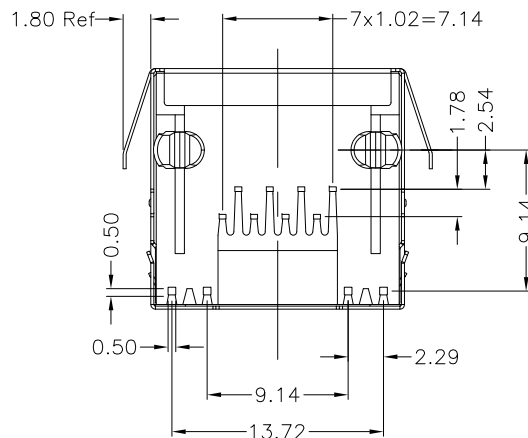

TOP VIEW

NOTES:

1.MATERIAL:

HOUSING:HIGH TEMPERATURE THERMO PLASTIC (UL94V-0),BLACK
CONTACT:PHOSPHOR BORNEZ
SHELL:SUS201-1/2H

2.FINISHED:

CONTACT:50u"MIN. NICKEL UNDERPLATING ALL AREA,
100u"MIN. TIN ON SOLDER TAILS,
SELECT GOLD PLATING ON CONTACT AREA.

SHELL:30u"MIN. NICKEL PRE-PLATING ALL AREA

3.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68.500 (D)(2)

REV.	ECN. NO.	DRAWN	DATE
A	NEW	JOHN	23/03/2015

DST-conn Tech. Co., Ltd.



⊗: QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: 11JETAD-xxxxx		
APPROVED		.X $\pm$ 0.38	X'. $\pm$ 2'	TITLE:RJ45 1X1 PORT TAB UP W/ LED , SHELL , T/S		
CHECKED		.XX $\pm$ 0.25	.X' $\pm$ 1'			
DRAWN		.XXX $\pm$ 0.13	.X' $\pm$ 1'			
UNIT: mm		SCALE: 2:1		SHEET: 1/1	REV.: A	

SIZE: A4