
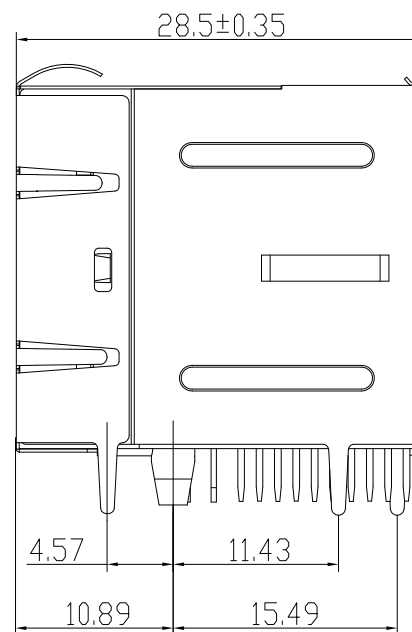


1. MECHANICAL DIMENSIONS :

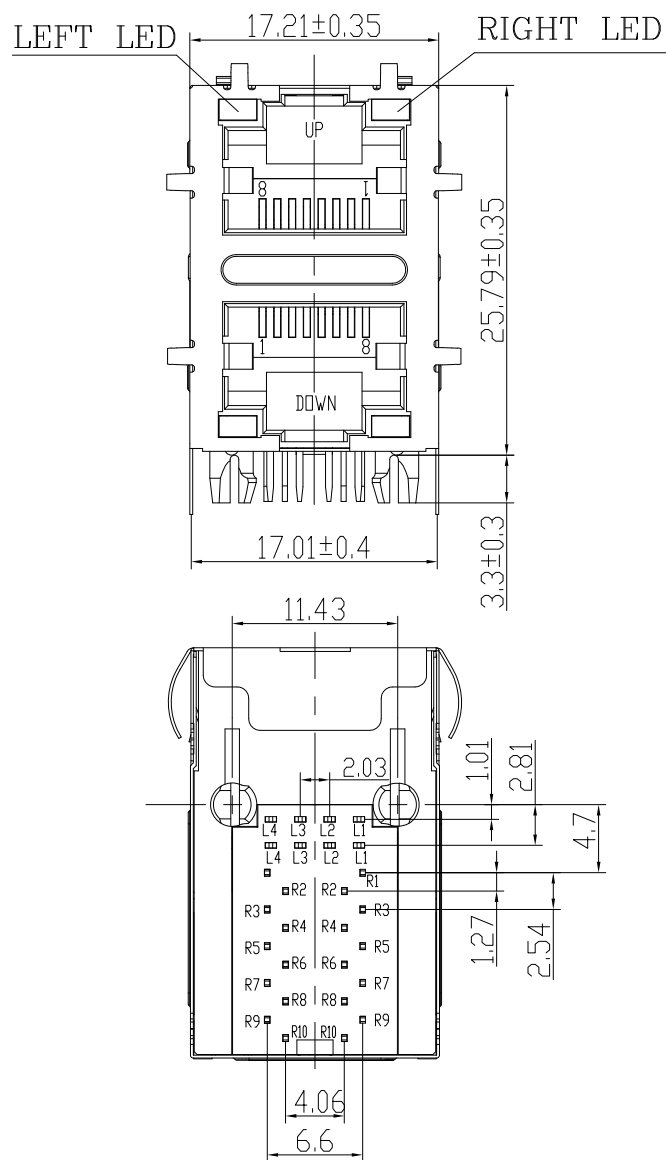

MATERIAL:

- 1.HOUSING: PA66+GLASS FILLED (UL 94V-0),BLACK
- 2.CONTACTS: 0.46mm THICKNESS PHOSPHOR BRONZE
ALLOY SELECTIVE GOLD PLATING OVER NICKEL
- 3.SHIELDING: 0.2mm THICKNESS COPPER ALLOY WITH TIN PLATED
- 4.GOLD PLATING: GOLD PLATING 6u" ON CONTACT AERA
- 5.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS,PART 68 SUBPART F

REV.	ECN. NO.	DRAWN	DATE
A	NEW	JOHN	18/05/2015

DST-conn Tech. Co., Ltd.




⊗:QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: 21BM1D-xxxx-xxx		
APPROVED		.X± 0.38	X.'± 2'	TITLE:RJ45 2X1 W/LED,SHELL,T/S 100/1000 MBPS 10P8C		
CHECKED		.XX± 0.25	.X'± 1'			
DRAWN		.XXX± 0.13				
UNIT: mm				SCALE: 1:1	SHEET: 1/4	REV.: A

説明: △ :備註 ◇ :版本變更 ⑨ :尺寸序號 ■ :重點尺寸 ▼ :CPK尺寸

SIZE: A4

2. PCB LAYOUT :

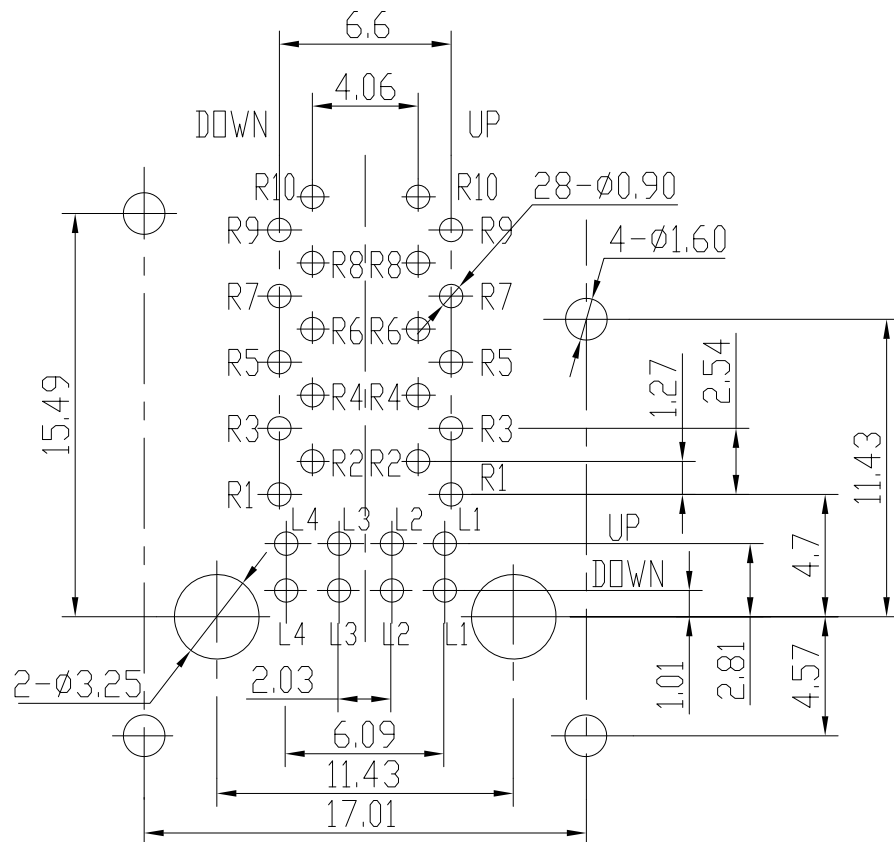


SUGGESTED PCB LAYOUT

(TOP VIEW)

DIMENSIONAL TOLERANCE: .XX ±0.05[0.002]

3. LED SCHEMATIC :

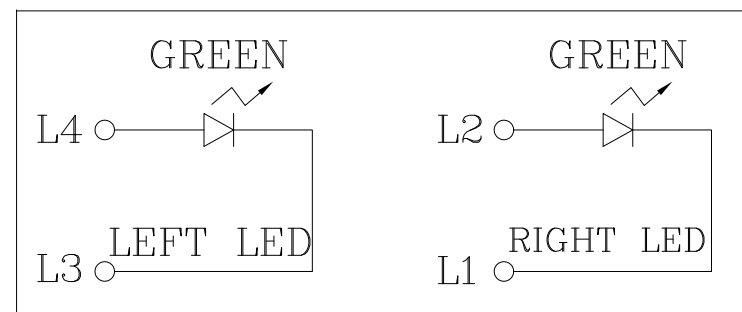

REV.	ECN. NO.	DRAWN	DATE
A	NEW	JOHN	18/05/2015

DST-conn Tech. Co., Ltd.

HSF


Compliant

⊗:QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: 21BM1D-xxxx-xxx		
APPROVED		.X± 0.38	X.'± 2'	TITLE:RJ45 2X1 W/LED,SHELL,T/S 100/1000 MBPS 10P8C		
CHECKED		.XX± 0.25	.X'± 1'			
DRAWN		.XXX± 0.13		UNIT: mm	SCALE: 1:1	SHEET: 2/4
					REV.: A	

說明: △ :備註 ◇ :版本變更 ⑨ :尺寸序號 ■ :重點尺寸 ▼ :CPK尺寸

SIZE: A4

4. SCHEMATIC :

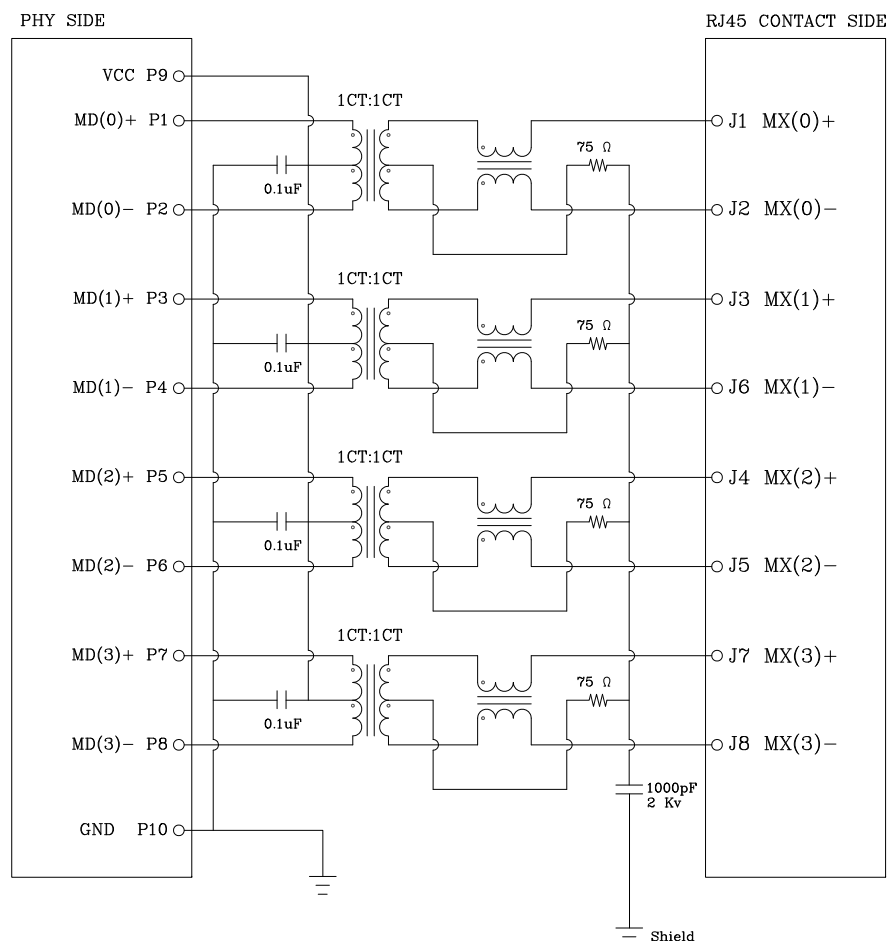

5. ELECTRICAL CHARACTERISTICS :

ELECTRICAL SPECIFICATIONS:

TEST NOTES:(25°±5°C)

1. TR:(100KHz,0.1V); 100%

PINS:(P1,P2):(J1,J2)=1:1±3%;(P3,P4):(J3,J6)=1:1±3%

PINS:(P5,P6):(J4,J5)=1:1±3%;(P7,P8):(J7,J8)=1:1±3%

2. LX:(100KHz,100mV,8mA, DC Bias) 100%

PINS:(P1,P2),(P3,P4),(P5,P6),(P7,P8)=350uH MINIMUM

3. DCR: 100%

PINS:(J1,J2),(J3,J6),(J4,J5),(J7,J8)=1.2 OHM MAXIMUM

4. HIPOT: 100%

PINS(P1,P2)TO(J1,J2),(P3,P4)TO(J3,J6)=1500VAC FOR 60 SECONDS

PINS(P5,P6)TO(J4,J5),(P7,P8)TO(J7,J8)=1500VAC FOR 60 SECONDS

5. INSERTION LOSS:

-1.0dB MAXIMUM AT 1MHz TO 100MHz;

6.RETURN LOSS:

-18dB MINIMUM AT 1MHz TO 30MHz;

-16dB MINIMUM AT 30MHz TO 60MHz;

-12dB MINIMUM AT 60MHz TO 100MHz;

7.CROSS TALK:

-30dB MINIMUM AT 1MHz TO 100MHz

8.COMMON TO COMMON MODE REJECTION:

-30dB MINIMUM AT 1MHz TO 100MHz

REV.	ECN. NO.	DRAWN	DATE
A	NEW	JOHN	18/05/2015


DST-conn Tech. Co., Ltd.




⊗:QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: 21BM1D-xxxx-xxx		
APPROVED		.X± 0.38	X.'± 2'	TITLE:RJ45 2X1 W/LED,SHELL,T/S 100/1000 MBPS 10P8C		
CHECKED		.XX± 0.25	.X'± 1'			
DRAWN		.XXX± 0.13		UNIT: mm	SCALE: 1:1	SHEET: 3/4
						REV.: A

説明: △ :備註 ◇ :版本變更 ⑨ :尺寸序號 ■ :重點尺寸 ▼ :CPK尺寸


SIZE: A4

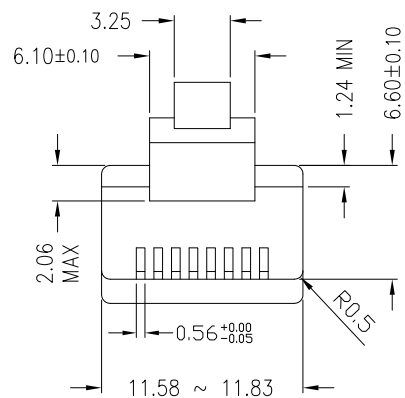

- * There must be no damage to housing or locking latch. There must be no nicks or cuts in cable.
- * Durability : 750 cycles generally

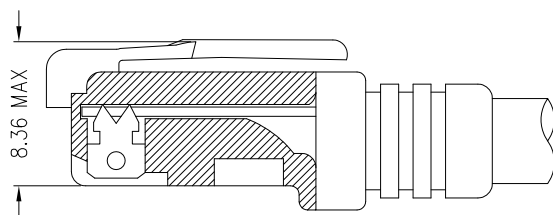

FOLLOW SPECIFICATION : FCC, PART 68, SUBPART F
FIGURE 68.500 (C)(2)(ii)

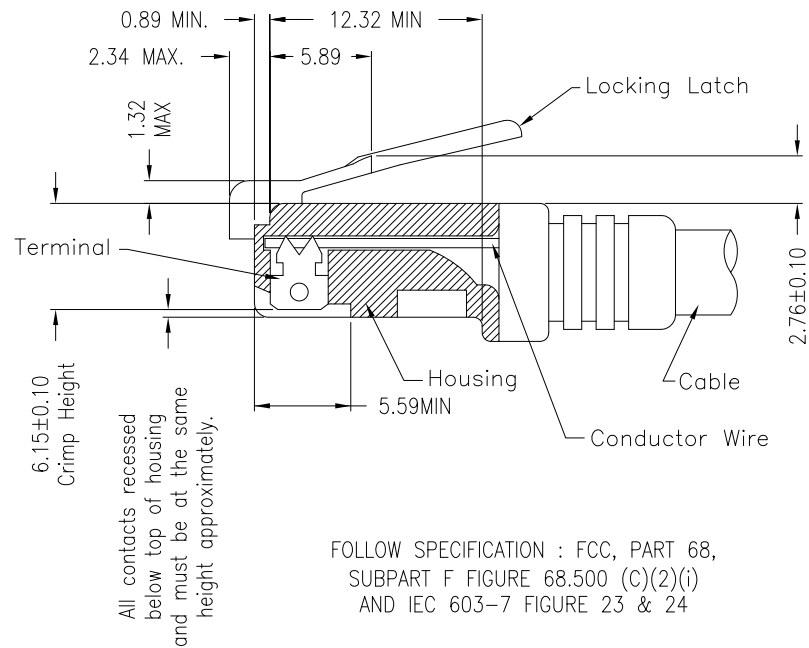

FOLLOW SPECIFICATION : FCC, PART 68,
SUBPART F FIGURE 68.500 (C)(2)(i)
AND IEC 603-7 FIGURE 23 & 24

STANDARD MODULAR PLUG ASSEMBLY

REV.	ECN. NO.	DRAWN	DATE
A	NEW	JOHN	18/05/2015

DST-conn Tech. Co., Ltd.



⊗:QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: 21BM1D-xxxx-xxx	
APPROVED		.X± 0.38	X.*± 2'	TITLE:RJ45 2X1 W/LED,SHELL,T/S 100/1000 MBPS 10P8C	
CHECKED		.XX± 0.25	.X*± 1'		
DRAWN		.XXX± 0.13			
UNIT: mm		⊕	⊖	SCALE: 1:1	SHEET: 4/4
				REV.: A	

説明: △ :備註 ◇ :版本變更 ㊦ :尺寸序號 ■ :重點尺寸 ▼ :CPK尺寸

SIZE: A4