


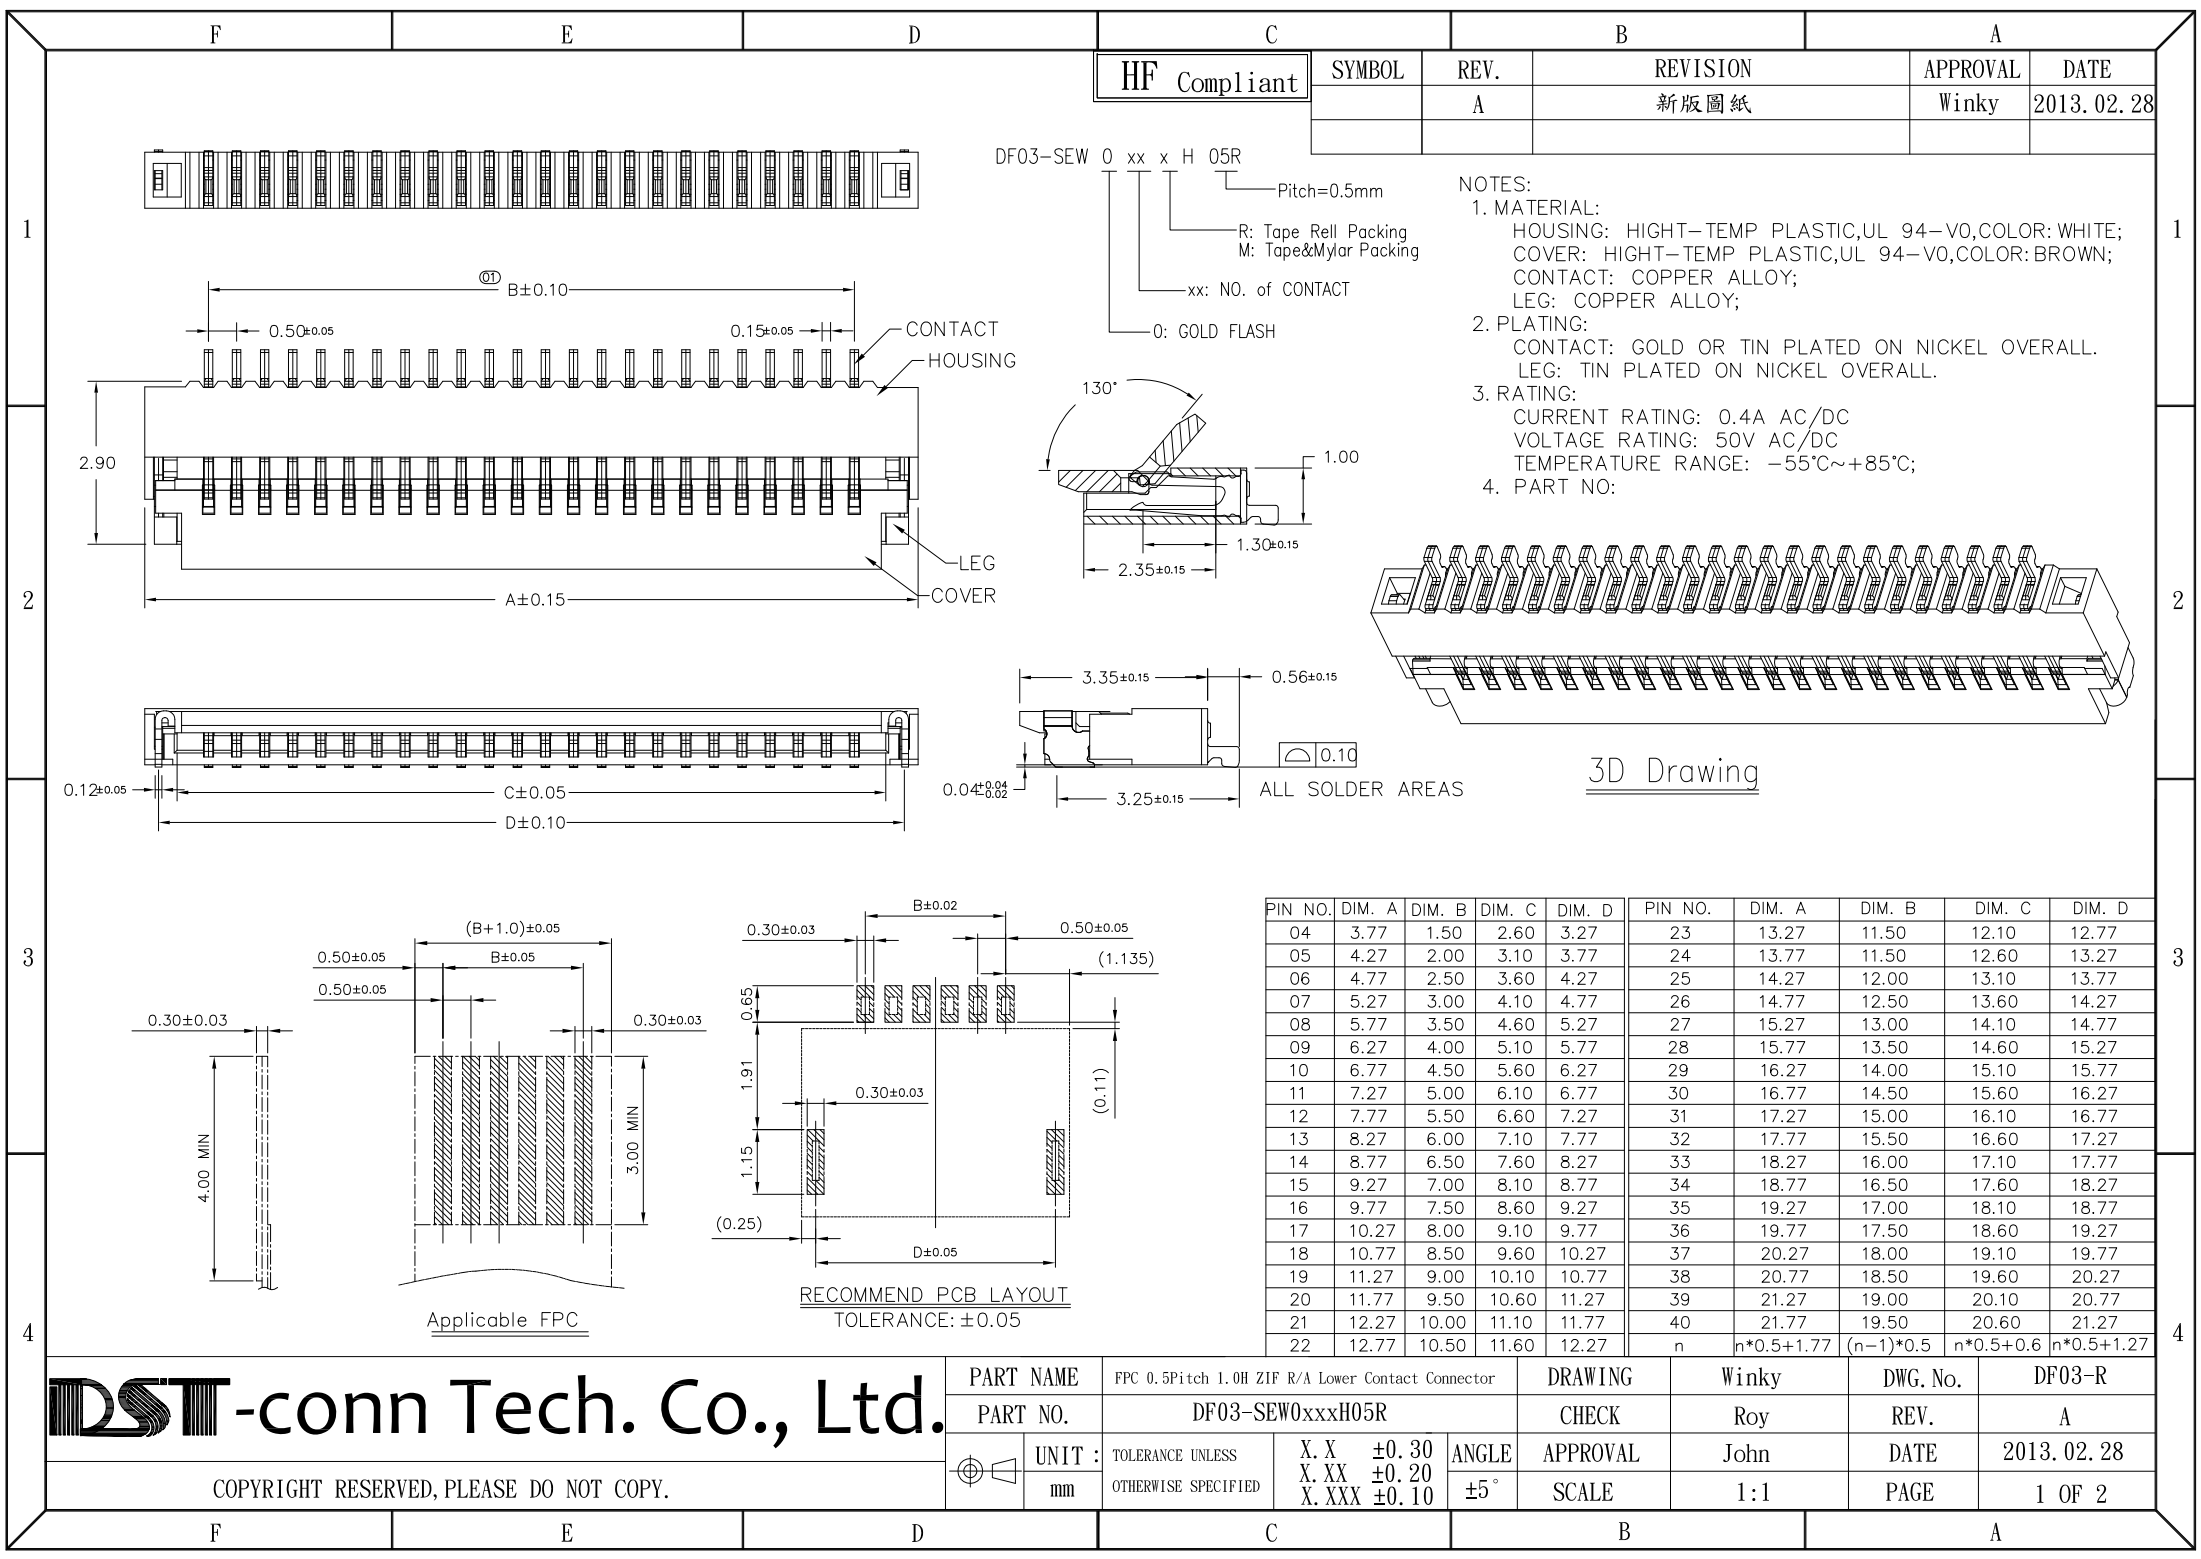

HF Compliant

SYMBOL

REV.

REVISION

APPROVAL

DATE

A


新版圖紙

Winky




2013.02.28

DF03-SEW 0 xx x H 05R
Pitch=0.5mm
R: Tape Rell Packing
M: Tape&Mylar Packing
xx: NO. of CONTACT
0: GOLD FLASH


- NOTES:
1. MATERIAL:
HOUSING: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR: WHITE;
COVER: HIGHT-TEMP PLASTIC,UL 94-V0,COLOR: BROWN;
CONTACT: COPPER ALLOY;
LEG: COPPER ALLOY;
 2. PLATING:
CONTACT: GOLD OR TIN PLATED ON NICKEL OVERALL.
LEG: TIN PLATED ON NICKEL OVERALL.
 3. RATING:
CURRENT RATING: 0.4A AC/DC
VOLTAGE RATING: 50V AC/DC
TEMPERATURE RANGE: -55°C~+85°C;
 4. PART NO:

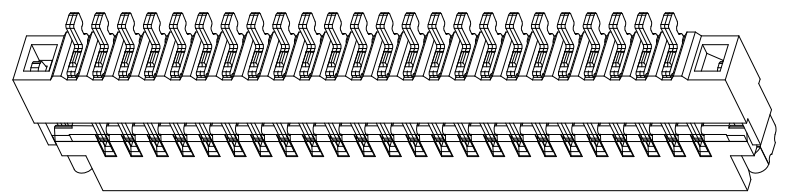

3D Drawing

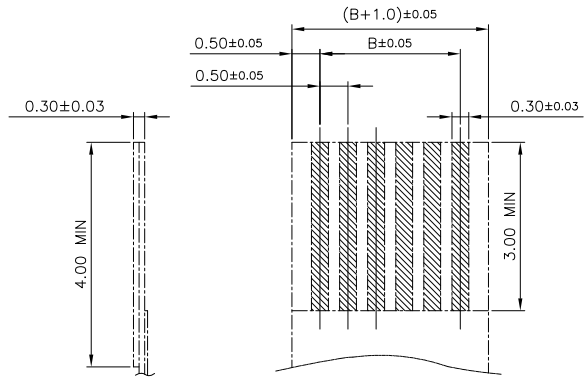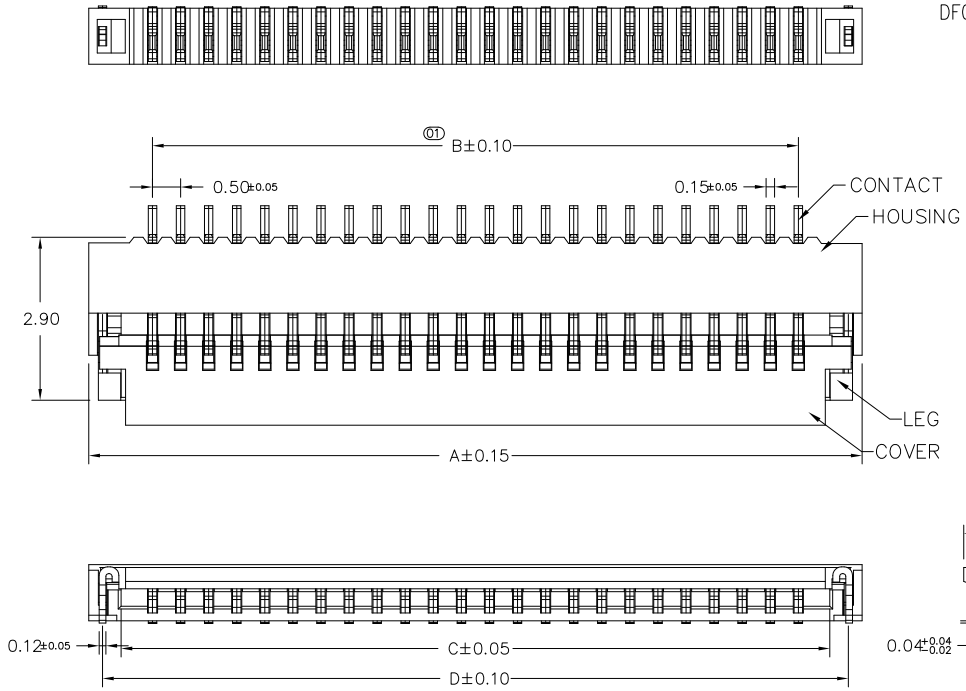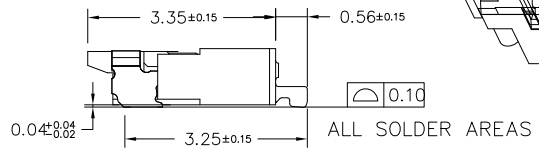

Applicable FPC

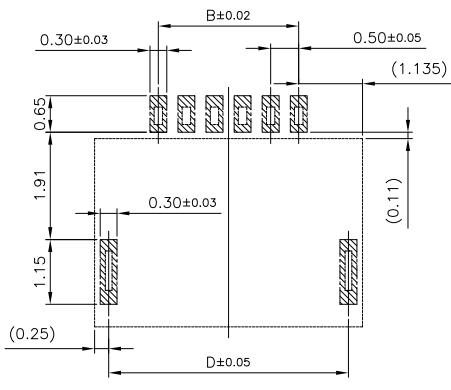


RECOMMEND PCB LAYOUT
TOLERANCE: ±0.05

PIN NO.	DIM. A	DIM. B	DIM. C	DIM. D	PIN NO.	DIM. A	DIM. B	DIM. C	DIM. D
04	3.77	1.50	2.60	3.27	23	13.27	11.50	12.10	12.77
05	4.27	2.00	3.10	3.77	24	13.77	11.50	12.60	13.27
06	4.77	2.50	3.60	4.27	25	14.27	12.00	13.10	13.77
07	5.27	3.00	4.10	4.77	26	14.77	12.50	13.60	14.27
08	5.77	3.50	4.60	5.27	27	15.27	13.00	14.10	14.77
09	6.27	4.00	5.10	5.77	28	15.77	13.50	14.60	15.27
10	6.77	4.50	5.60	6.27	29	16.27	14.00	15.10	15.77
11	7.27	5.00	6.10	6.77	30	16.77	14.50	15.60	16.27
12	7.77	5.50	6.60	7.27	31	17.27	15.00	16.10	16.77
13	8.27	6.00	7.10	7.77	32	17.77	15.50	16.60	17.27
14	8.77	6.50	7.60	8.27	33	18.27	16.00	17.10	17.77
15	9.27	7.00	8.10	8.77	34	18.77	16.50	17.60	18.27
16	9.77	7.50	8.60	9.27	35	19.27	17.00	18.10	18.77
17	10.27	8.00	9.10	9.77	36	19.77	17.50	18.60	19.27
18	10.77	8.50	9.60	10.27	37	20.27	18.00	19.10	19.77
19	11.27	9.00	10.10	10.77	38	20.77	18.50	19.60	20.27
20	11.77	9.50	10.60	11.27	39	21.27	19.00	20.10	20.77
21	12.27	10.00	11.10	11.77	40	21.77	19.50	20.60	21.27
22	12.77	10.50	11.60	12.27	n	n*0.5+1.77	(n-1)*0.5	n*0.5+0.6	n*0.5+1.27

DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.


PART NAME	FPC 0.5Pitch 1.0H ZIF R/A Lower Contact Connector			DRAWING	Winky	DWG. No.	DF03-R
PART NO.	DF03-SEW0xxxH05R			CHECK	Roy	REV.	A
UNIT :	TOLERANCE UNLESS	X. X ±0.30	ANGLE	APPROVAL	John	DATE	2013.02.28
mm	OTHERWISE SPECIFIED	X. XX ±0.20	±5°	SCALE	1:1	PAGE	1 OF 2
		X. XXX ±0.10					

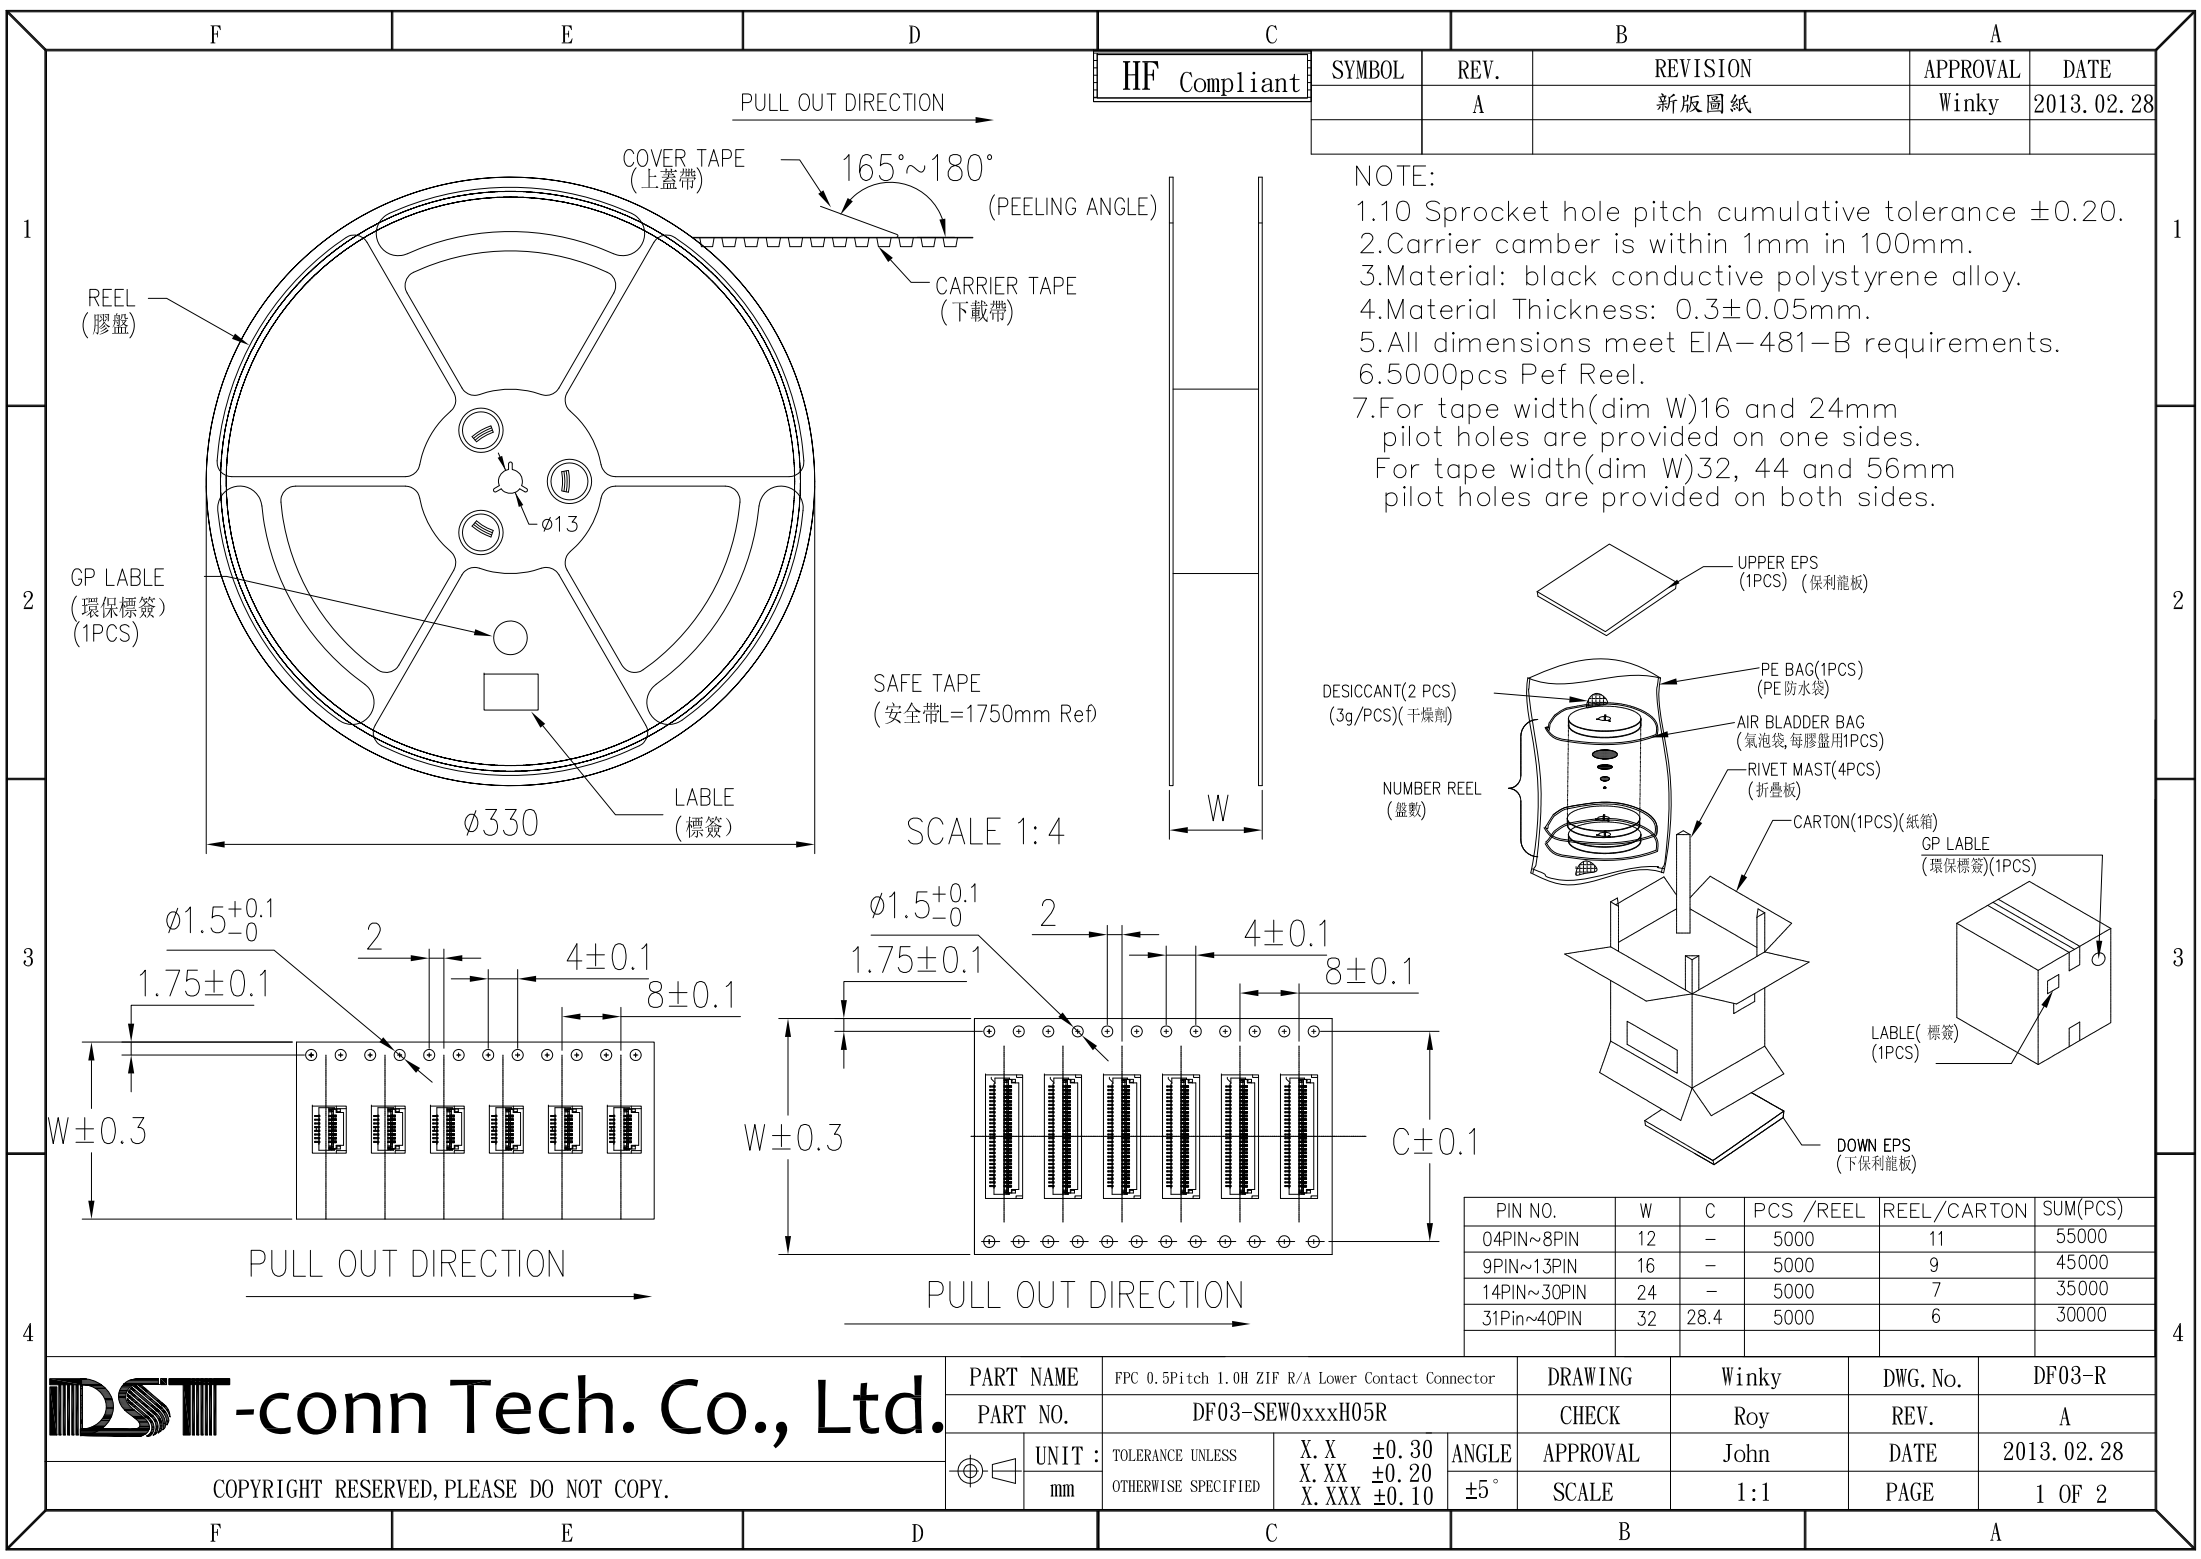

HF Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	Winky	2013.02.28

- NOTE:
- 1.10 Sprocket hole pitch cumulative tolerance ± 0.20 .
 - 2.Carrier camber is within 1mm in 100mm.
 - 3.Material: black conductive polystyrene alloy.
 - 4.Material Thickness: 0.3 ± 0.05 mm.
 - 5.All dimensions meet EIA-481-B requirements.
 - 6.5000pcs Pef Reel.
 - 7.For tape width(dim W)16 and 24mm pilot holes are provided on one sides.
For tape width(dim W)32, 44 and 56mm pilot holes are provided on both sides.

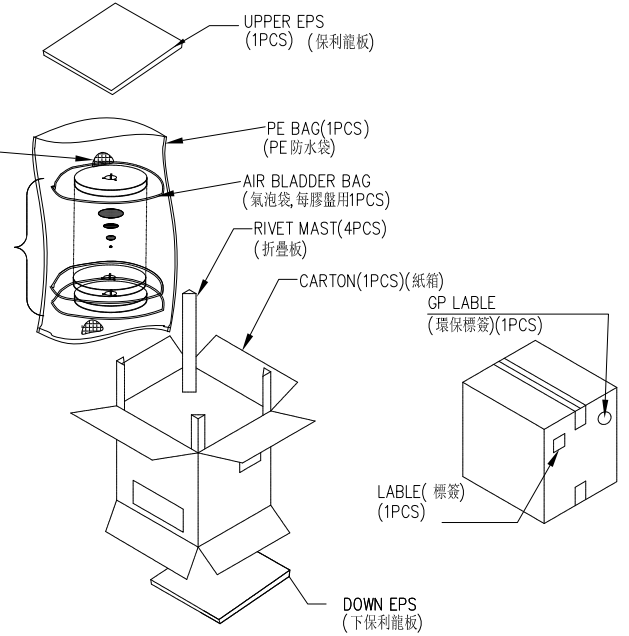

PIN NO.	W	C	PCS /REEL	REEL/CARTON	SUM(PCS)
04PIN~8PIN	12	-	5000	11	55000
9PIN~13PIN	16	-	5000	9	45000
14PIN~30PIN	24	-	5000	7	35000
31Pin~40PIN	32	28.4	5000	6	30000

DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		FPC 0.5Pitch 1.0H ZIF R/A Lower Contact Connector				DRAWING	Winky	DWG. No.	DF03-R	
PART NO.		DF03-SEW0xxxH05R				CHECK	Roy	REV.	A	
	UNIT :	TOLERANCE UNLESS		X. X ±0.30	ANGLE	APPROVAL	John	DATE	2013.02.28	
	mm	OTHERWISE SPECIFIED		X. XX ±0.20 X. XXX ±0.10		±5°	SCALE	1:1	PAGE	1 OF 2