SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	John	2015/05/03

RoHS Compliant

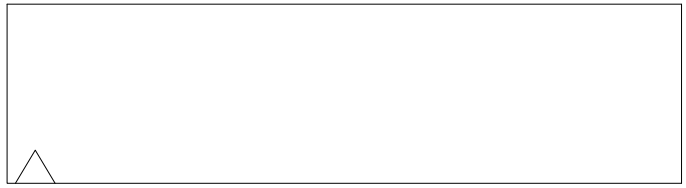

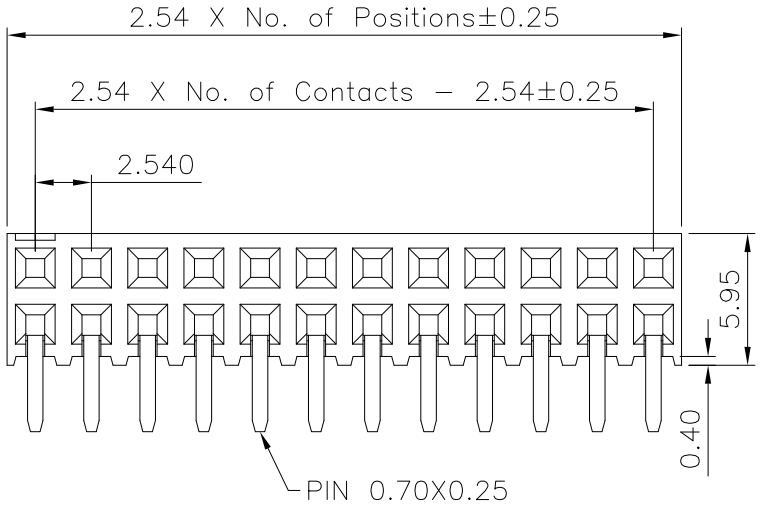

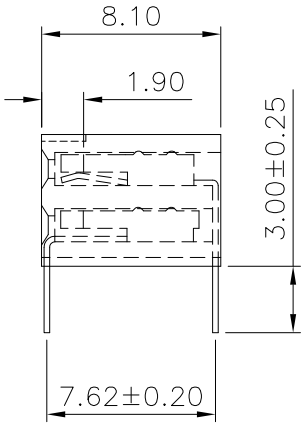

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩMin.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩMax.
Operating Temperature:-40°C to +105°C

Materials

Contact Material: Phosphor Bronze
Insulation Material: Polyester, UL 94V-0
PBT
All materials must be GP materials

Ordering Information

DH03-FG x xx GL54N

- xx: No. of Pins per Row
  xx:02~40
- x: Contact Plating
  S:Tin
  0:Gold Flash
  Duplex Plating
  G:Gold Flash/Tin
  5:Gold Flash 30u"/Tin 100u"

Recommended P.C.Board

Hole Layout



DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME	2.54 FEMALE HEADER DUAL ROWS DIP			DRAWING	Winky	DWG. No.	DH03
PART NO.	DH03-FGxxxGL54N			CHECK	Roy	REV.	A
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X.X X.XX X.XXX	ANGLE ±2°	APPROVAL	John	DATE	2015/05/03
				SCALE	1:1	PAGE	1 OF 1