


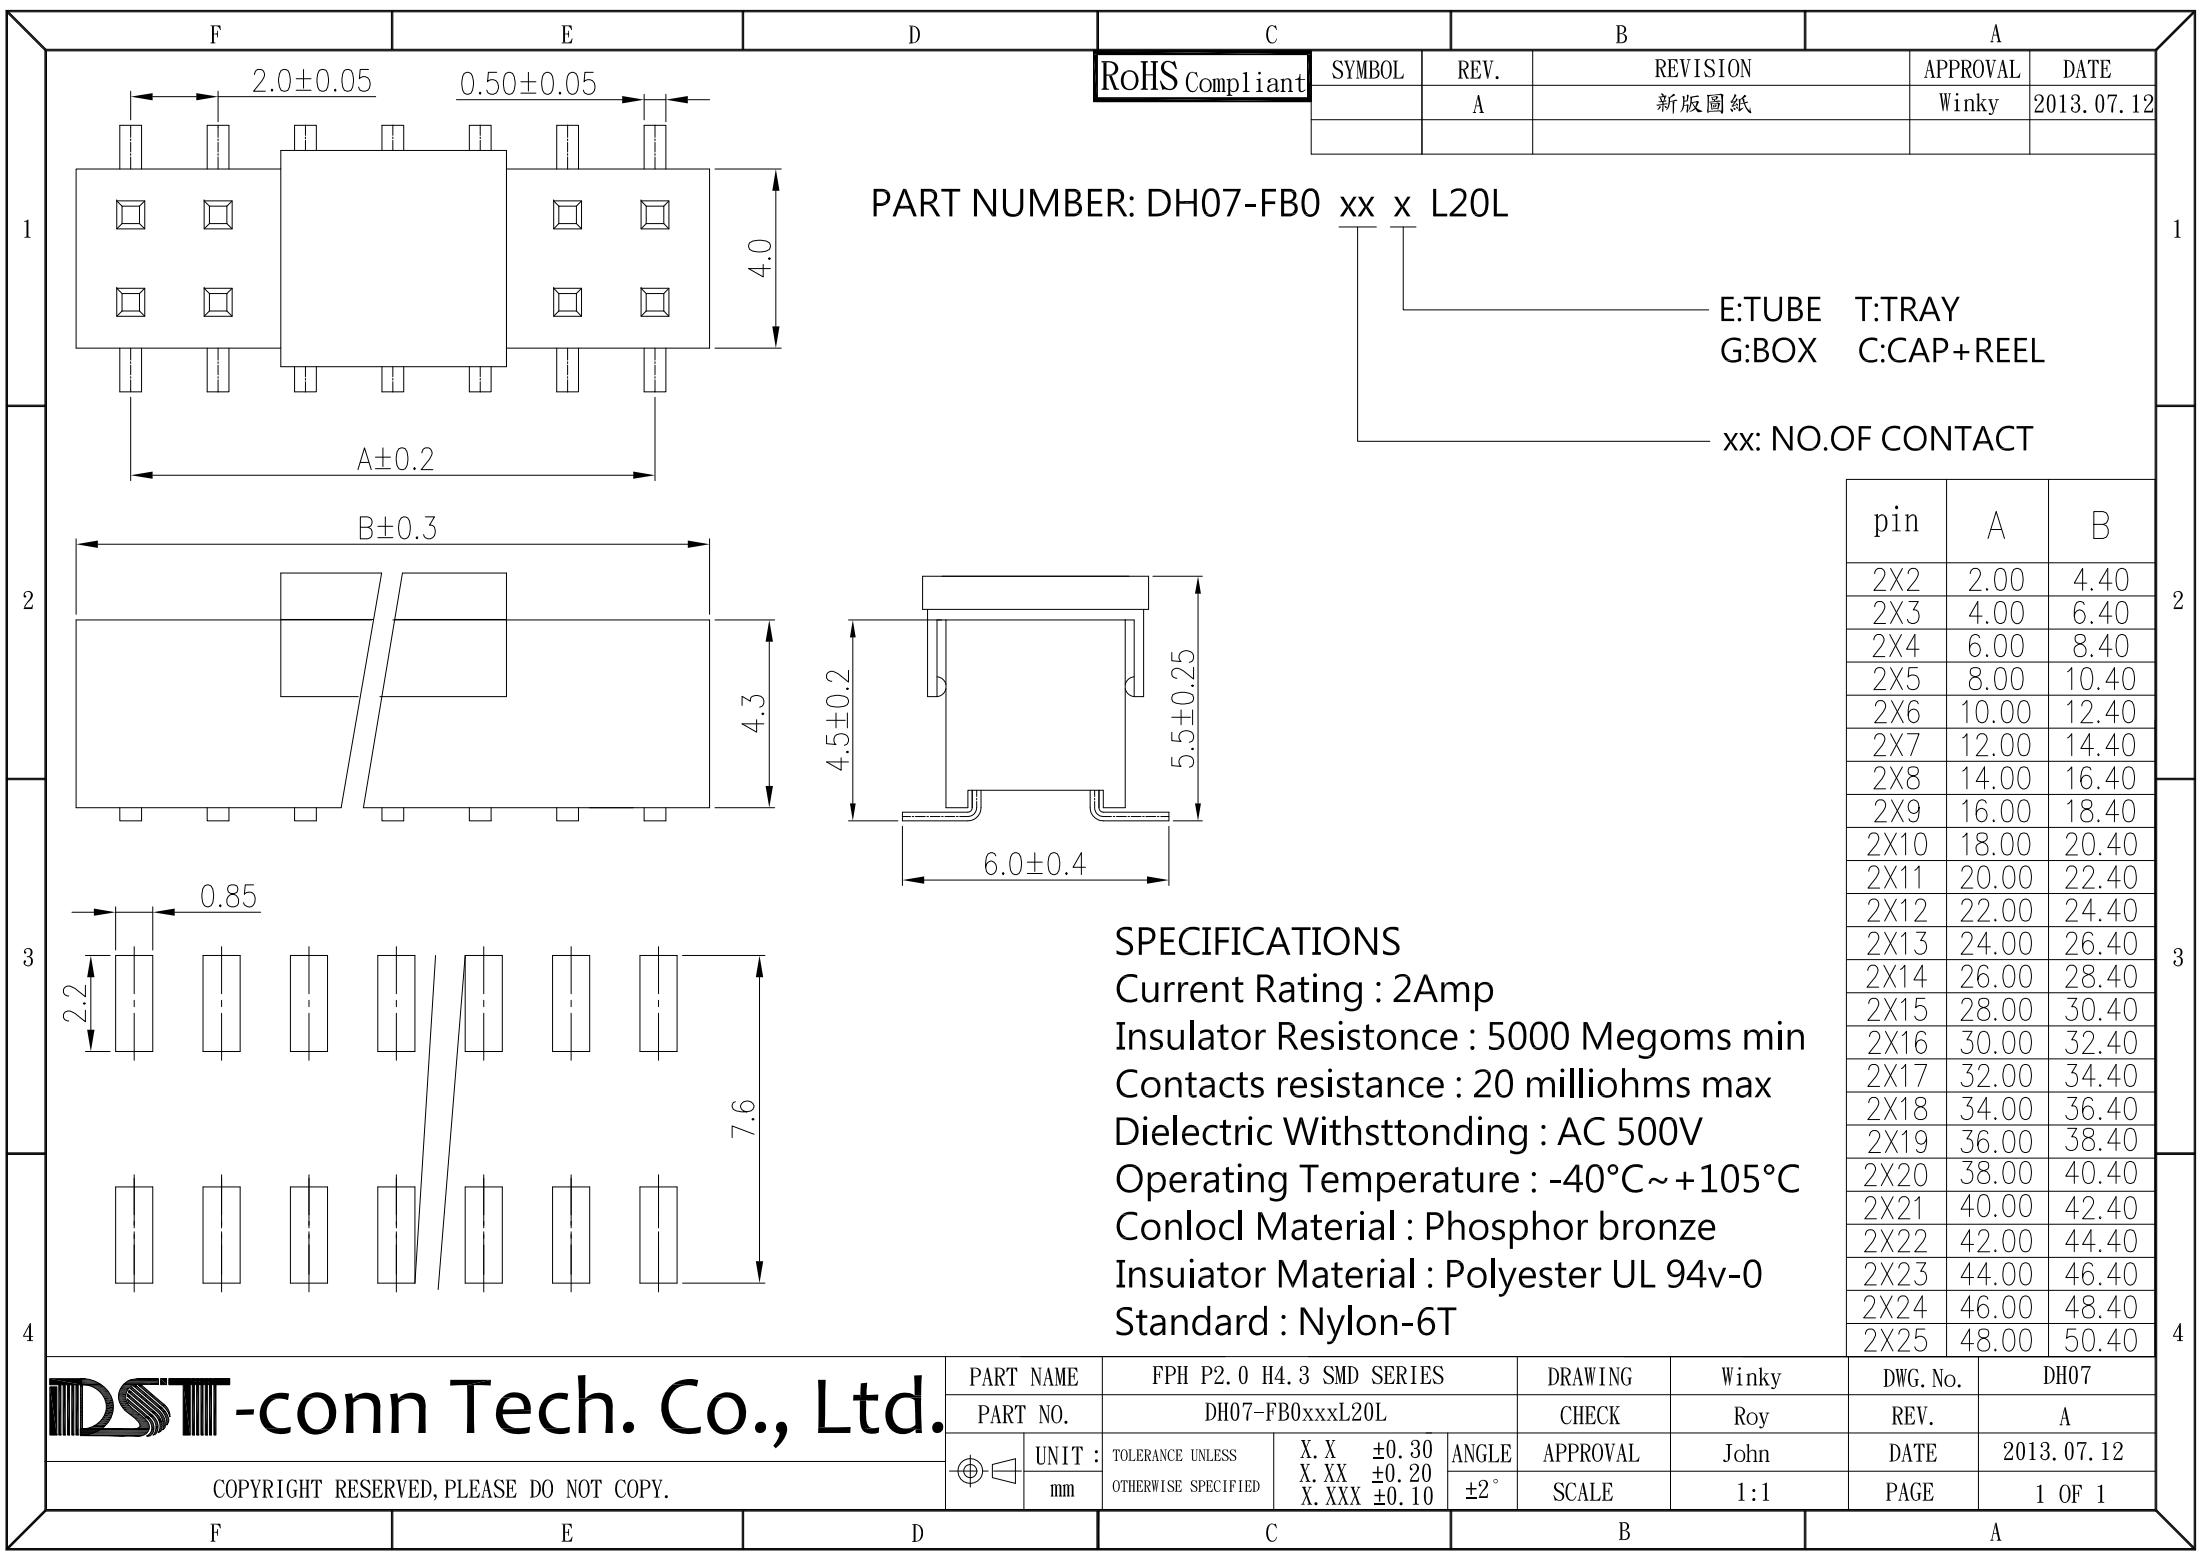

RoHS Compliant

| SYMBOL | REV. | REVISION | APPROVAL | DATE         |
|--------|------|----------|----------|--------------|
|        | A    | 新版圖紙     | Winky    | 2013. 07. 12 |
|        |      |          |          |              |

PART NUMBER: DH07-FB0 xx x L20L

E:TUBE T:TRAY  
G:BOX C:CAP+REEL

xx: NO.OF CONTACT

SPECIFICATIONS

Current Rating : 2Amp  
Insulator Resistance : 5000 Megoms min  
Contacts resistance : 20 milliohms max  
Dielectric Withsttonding : AC 500V  
Operating Temperature : -40°C~+105°C  
Conlocl Material : Phosphor bronze  
Insuiator Material : Polyester UL 94v-0  
Standard : Nylon-6T

DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

| PART NAME |        | FPH P2.0 H4.3 SMD SERIES |  |               |       | DRAWING  | Winky | DWG. No. | DH07         |
|-----------|--------|--------------------------|--|---------------|-------|----------|-------|----------|--------------|
| PART NO.  |        | DH07-FB0xxxL20L          |  |               |       | CHECK    | Roy   | REV.     | A            |
|           | UNIT : | TOLERANCE UNLESS         |  | X. X ±0. 30   | ANGLE | APPROVAL | John  | DATE     | 2013. 07. 12 |
|           |        | OTHERWISE SPECIFIED      |  | X. XX ±0. 20  |       | SCALE    | 1:1   | PAGE     | 1 OF 1       |
|           | mm     |                          |  | X. XXX ±0. 10 |       |          |       |          |              |