


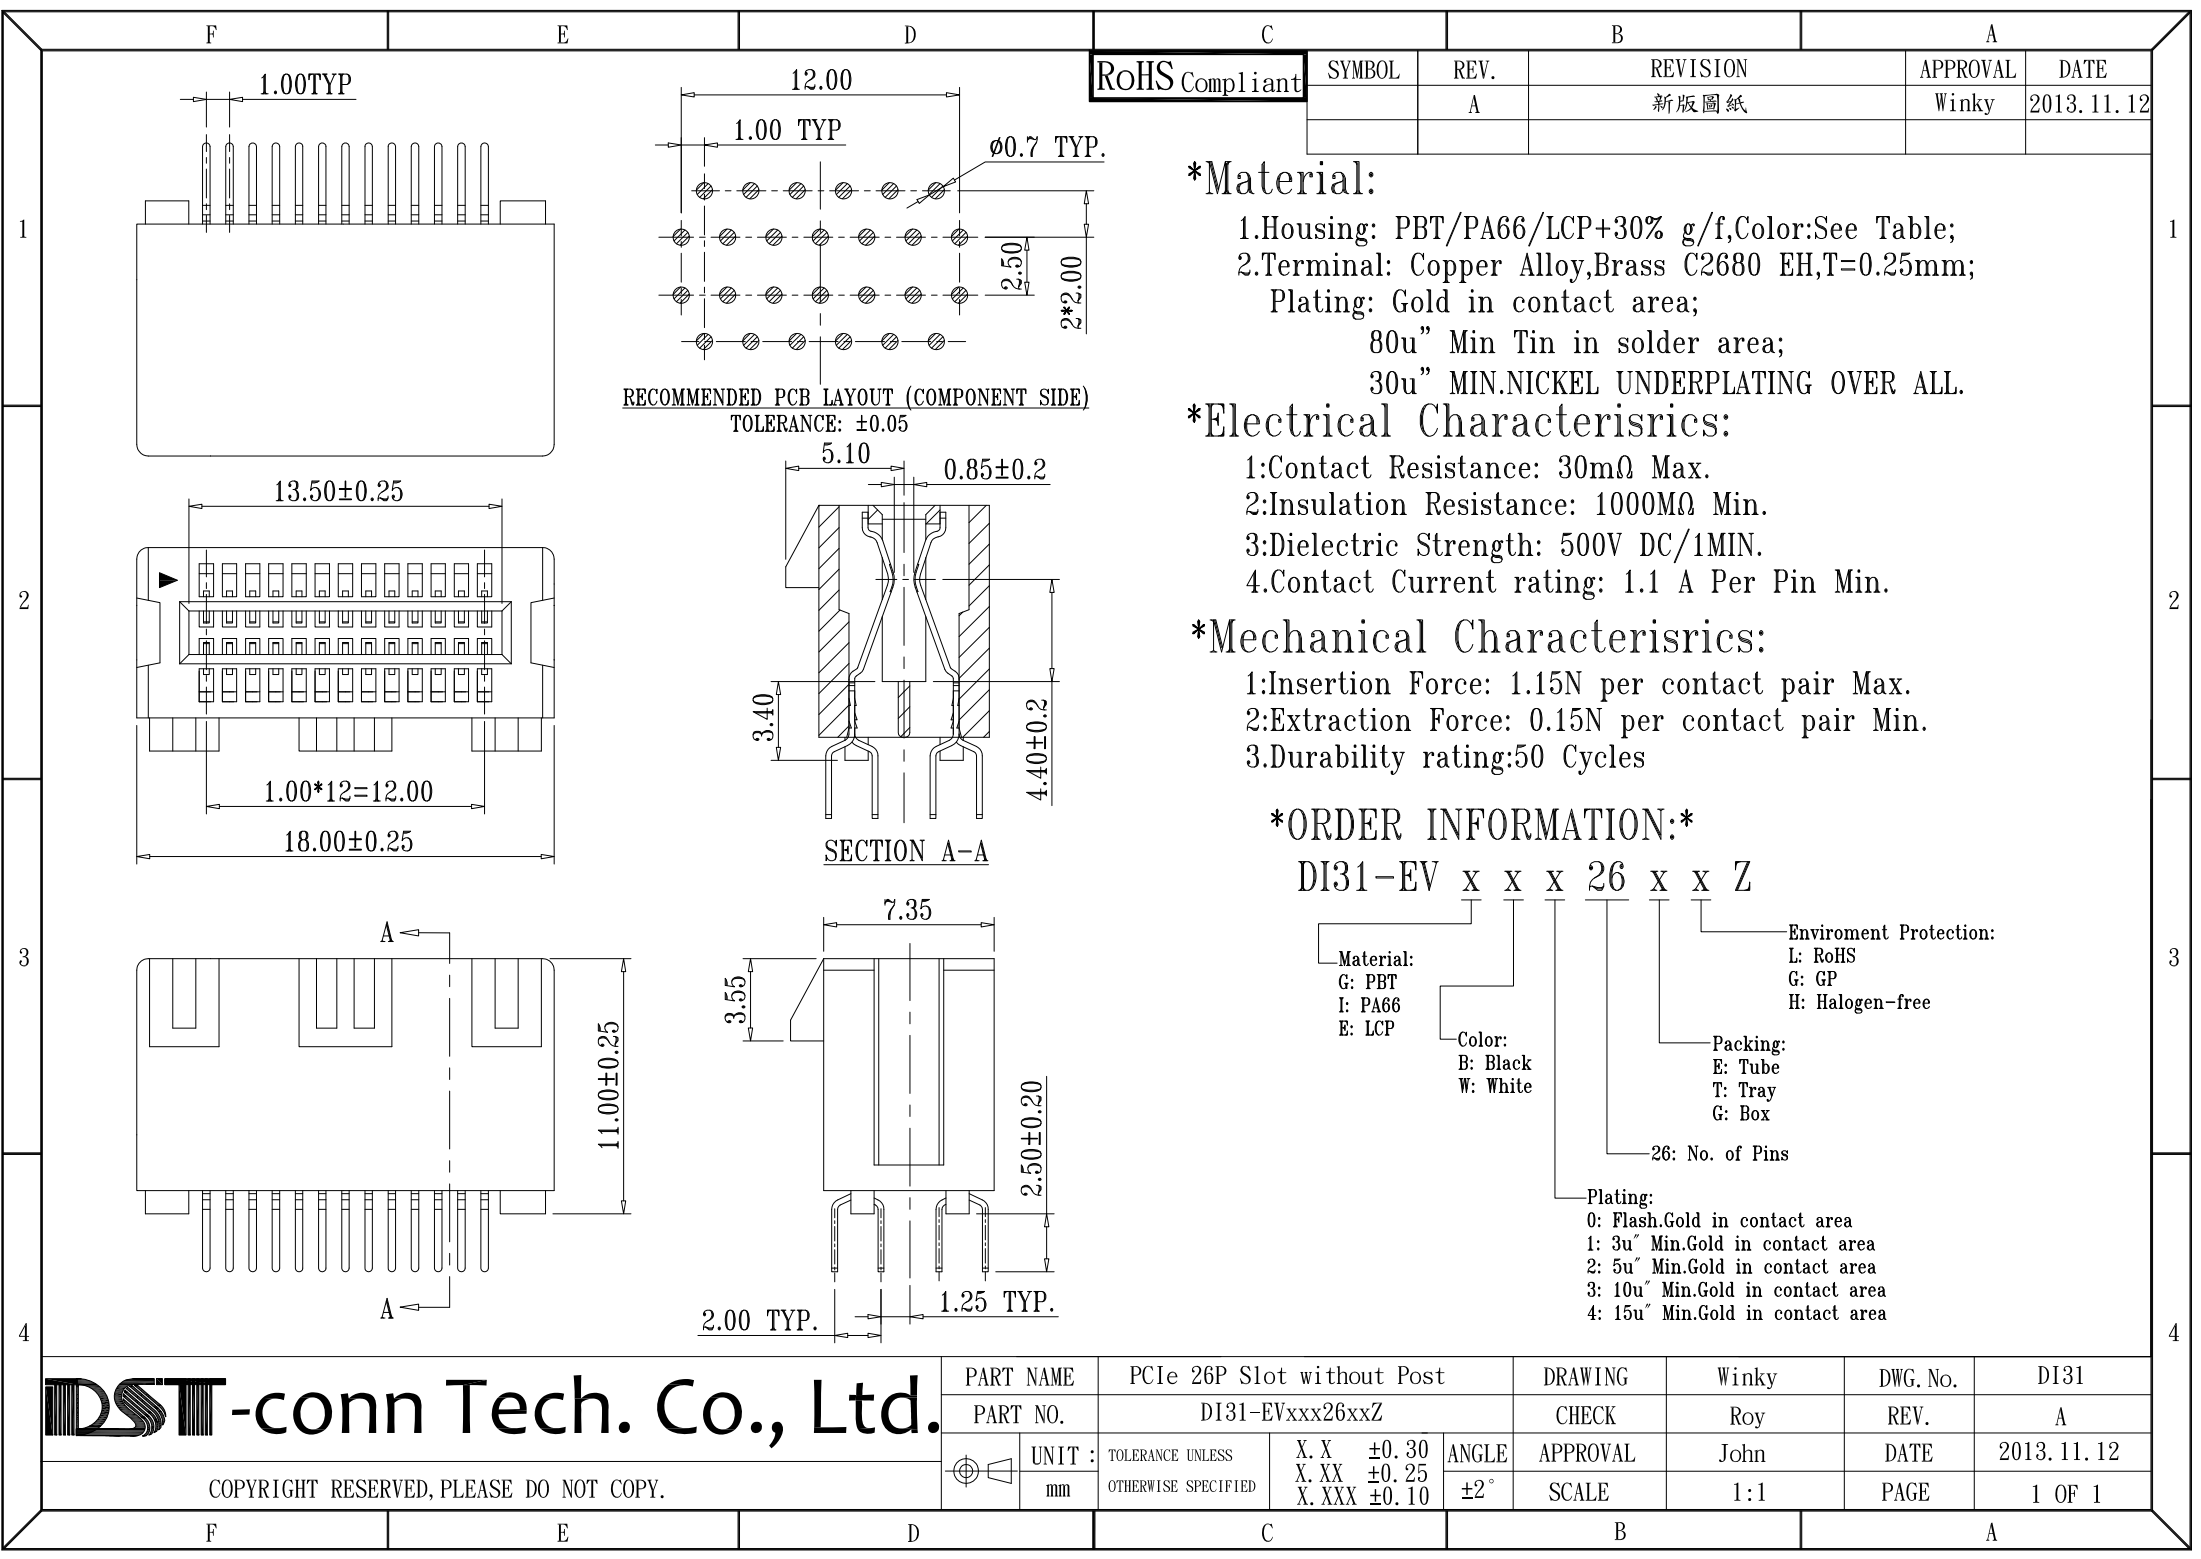

RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	Winky	2013. 11. 12

*Material:

- 1.Housing: PBT/PA66/LCP+30% g/f,Color:See Table;
- 2.Terminal: Copper Alloy,Brass C2680 EH,T=0.25mm;
Plating: Gold in contact area;
80u" Min Tin in solder area;
30u" MIN.NICKEL UNDERPLATING OVER ALL.

*Electrical Characterisrics:

- 1:Contact Resistance: 30mΩ Max.
- 2:Insulation Resistance: 1000MΩ Min.
- 3:Dielectric Strength: 500V DC/1MIN.
- 4.Contact Current rating: 1.1 A Per Pin Min.

*Mechanical Characterisrics:

- 1:Insertion Force: 1.15N per contact pair Max.
- 2:Extraction Force: 0.15N per contact pair Min.
- 3.Durability rating:50 Cycles

ORDER INFORMATION:

DI31-EV X X X 26 X X Z

Material:
G: PBT
I: PA66
E: LCP

Color:
B: Black
W: White

Enviroment Protection:
L: RoHS
G: GP
H: Halogen-free

Packing:
E: Tube
T: Tray
G: Box

26: No. of Pins

Plating:
0: Flash.Gold in contact area
1: 3u" Min.Gold in contact area
2: 5u" Min.Gold in contact area
3: 10u" Min.Gold in contact area
4: 15u" Min.Gold in contact area

DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		PCIe 26P Slot without Post			DRAWING	Winky	DWG. No.	DI31
PART NO.		DI31-EVxxx26xxZ			CHECK	Roy	REV.	A
	UNIT :	TOLERANCE UNLESS OTHERWISE SPECIFIED	X. X ±0.30	ANGLE	APPROVAL	John	DATE	2013. 11. 12
	mm		X. XX ±0.25					
			X. XXX ±0.10					
			±2°		SCALE	1:1	PAGE	1 OF 1