


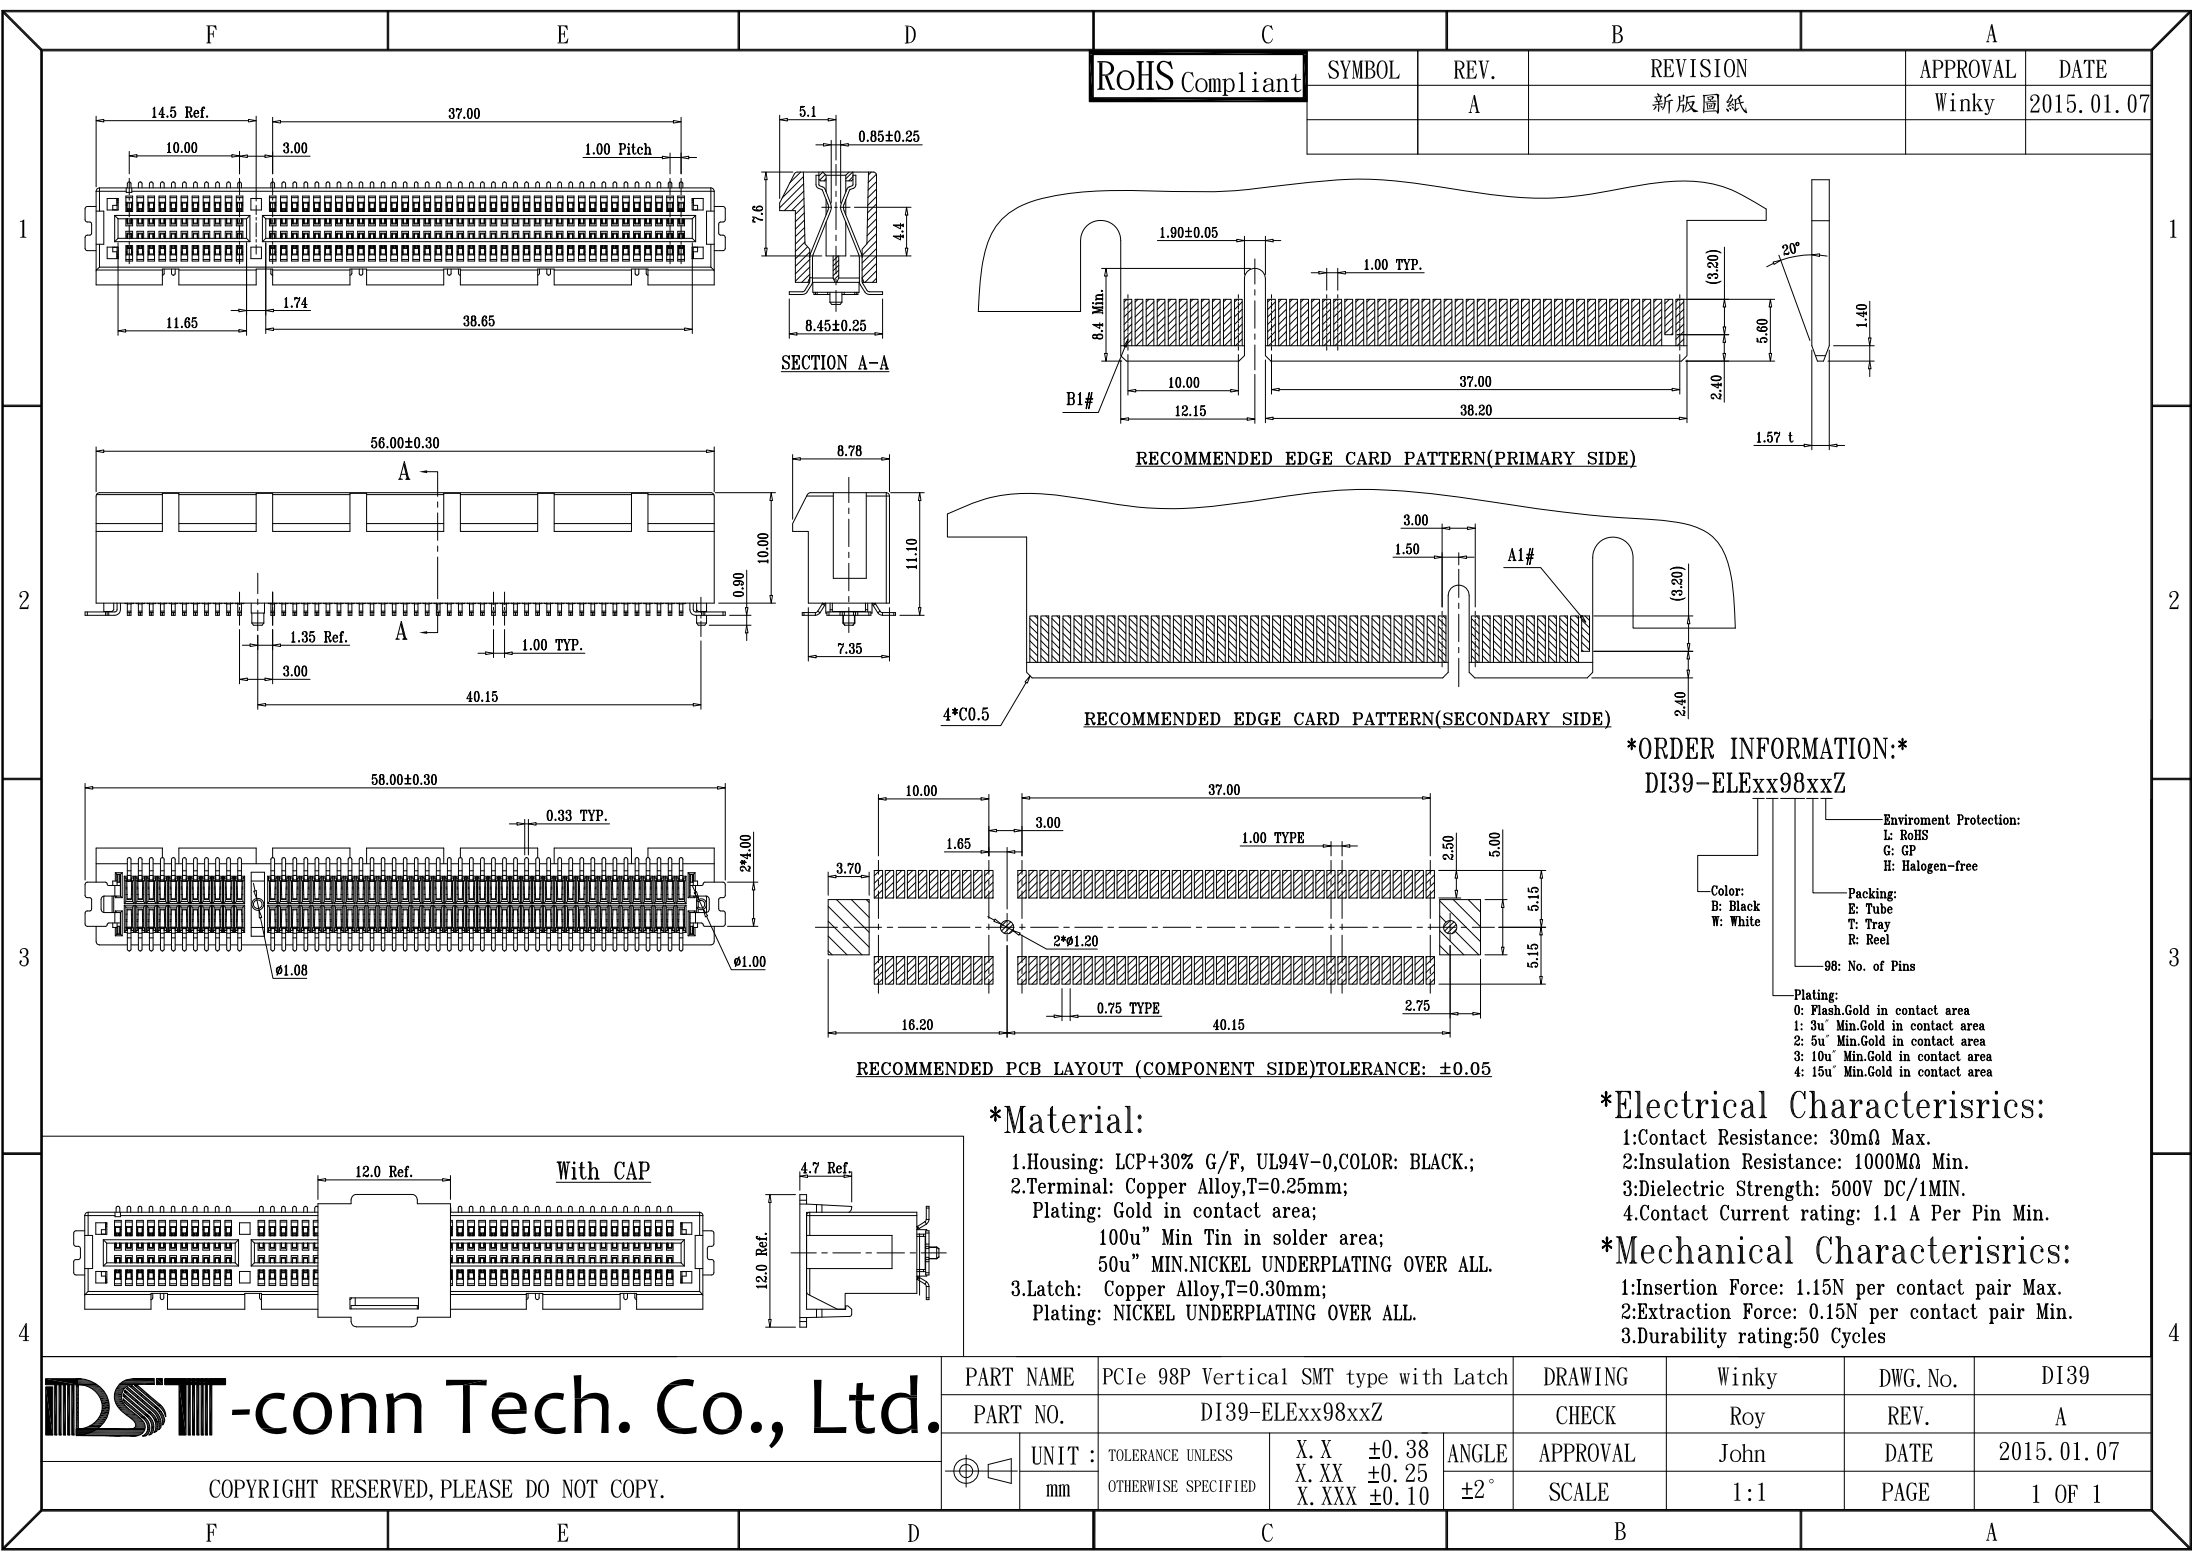

RoHS Compliant

SYMBOL	REV.	REVISION	APPROVAL	DATE
	A	新版圖紙	Winky	2015.01.07

ORDER INFORMATION:
DI39-ELExx98xxZ

Enviroment Protection:
L: RoHS
G: GP
H: Halogen-free

Packing:
E: Tube
T: Tray
R: Reel

98: No. of Pins

Color:
B: Black
W: White

Plating:
0: Flash.Gold in contact area
1: 3u" Min.Gold in contact area
2: 5u" Min.Gold in contact area
3: 10u" Min.Gold in contact area
4: 15u" Min.Gold in contact area

*Material:

- 1.Housing: LCP+30% G/F, UL94V-0,COLOR: BLACK.;
- 2.Terminal: Copper Alloy,T=0.25mm;
Plating: Gold in contact area;
100u" Min Tin in solder area;
50u" MIN.NICKEL UNDERPLATING OVER ALL.
- 3.Latch: Copper Alloy,T=0.30mm;
Plating: NICKEL UNDERPLATING OVER ALL.

*Electrical Characterisrics:

- 1:Contact Resistance: 30mΩ Max.
- 2:Insulation Resistance: 1000MΩ Min.
- 3:Dielectric Strength: 500V DC/1MIN.
- 4.Contact Current rating: 1.1 A Per Pin Min.

*Mechanical Characterisrics:

- 1:Insertion Force: 1.15N per contact pair Max.
- 2:Extraction Force: 0.15N per contact pair Min.
- 3.Durability rating:50 Cycles

DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		PCIE 98P Vertical SMT type with Latch		DRAWING	Winky	DWG.No.	DI39
PART NO.		DI39-ELExx98xxZ		CHECK	Roy	REV.	A
UNIT : mm	TOLERANCE UNLESS OTHERWISE SPECIFIED	X. X ±0.38 X. XX ±0.25 X. XXX ±0.10	ANGLE ±2°	APPROVAL	John	DATE	2015.01.07
				SCALE	1:1	PAGE	1 OF 1