

F

E

D

C

B

A

RoHS Compliant

SYMBOL

REV.

REVISION

APPROVAL

DATE

A

新版圖紙

Winky

2012. 07. 23

NOTES:

1, MATERIAL:

HOUSING: SEE TABLE, UL94V-0, BLACK

CONTACT: PHOSPHOR BRONZE T=0.30±0.01mm

SPRING: SUS 301(ADD HARD) T=0.20±0.01mm

2, PLATING:

CONTACT: GOLD OVER 50u" MIN NICKEL

UNDERPLATE, SOLDER TAIL 150u" MIN TIN OVER

50u" MIN NICKEL UNDERPLATE

GOLD SPECIFICATION:

a: G/F ; b: 15U" ; c: 30U"

3. ELECTRICAL SPECIFICATION:

CURRENT RATING: 1.5 AMPERE PER CONTACT


CONTACT RESISTANCE: 30 MILLIOHMS MAX.

INSULATION RESISTANCE: 1000 MEGOHMS MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC.

OPERATING TEMPERATURE: -20°C ~ +85°C

4. THE PRODUCT SHOULD BE GP COMPLIANCE

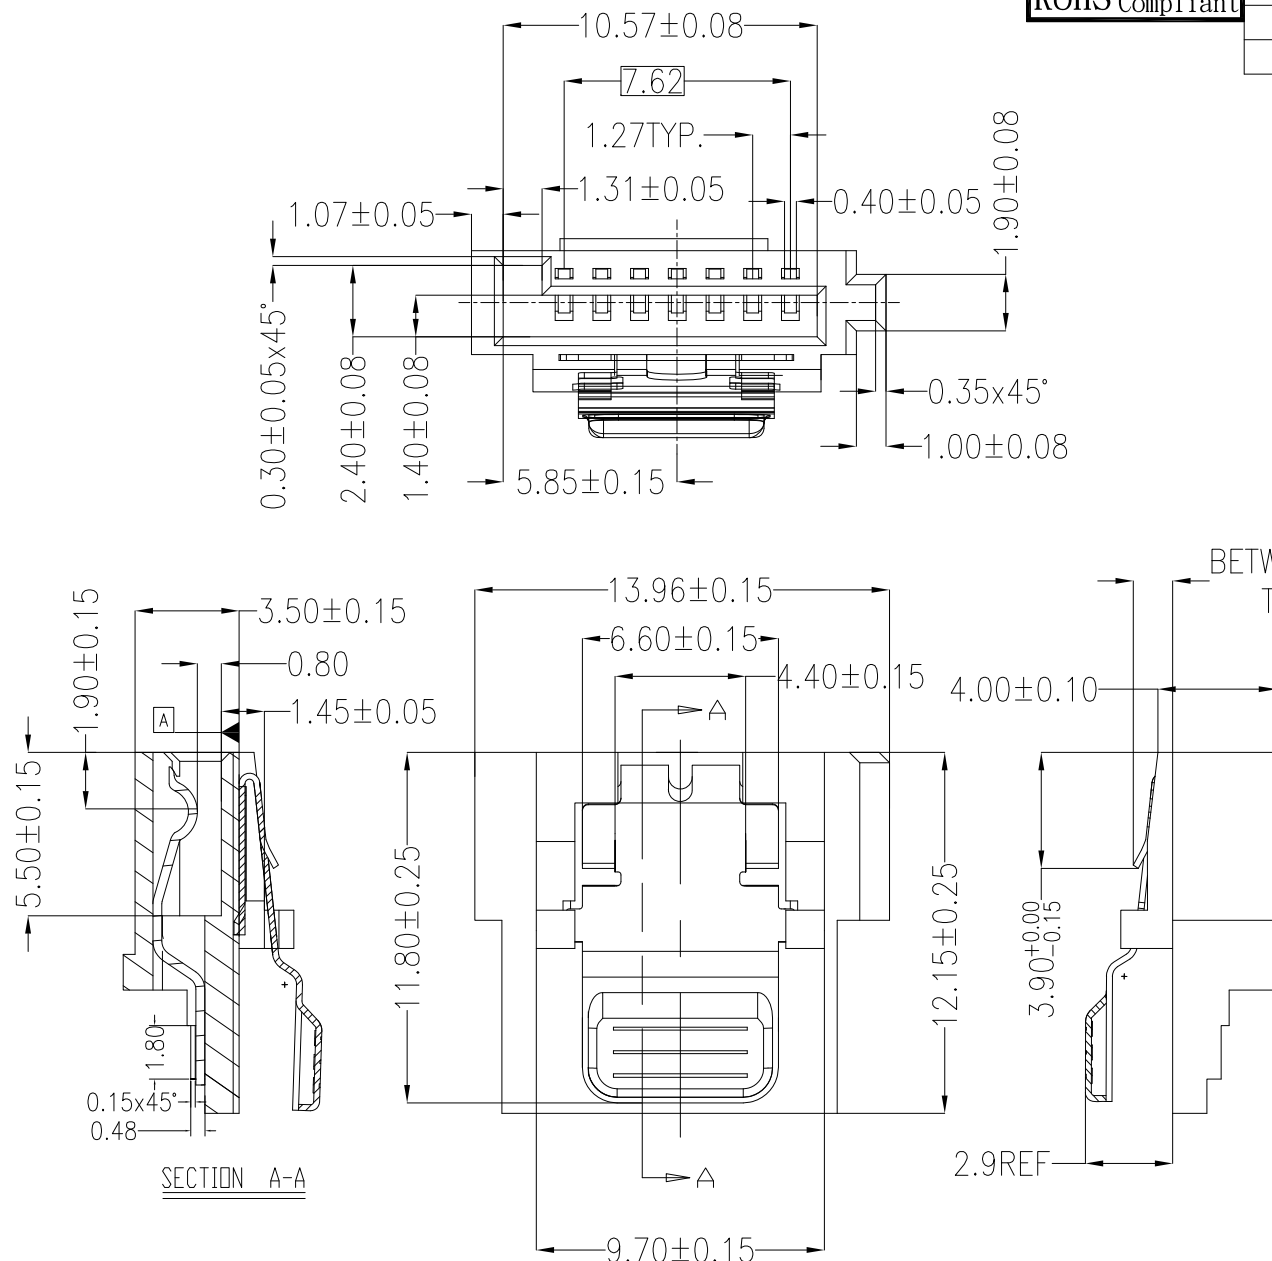

TABLE

DS04-P3407GH12SK	15u"	PBT(無鹵)
DS04-P3507GL12SK	30u"	PBT
DS04-PE407GL12SK	15u"	LCP
DS04-PG407GL12SK	15u"	PBT+30%G/F
DS04-PG007GL12SK	G/F	PBT+30%G/F
PART NO.	PLATED	BASE MATERIAL

DST-conn Tech. Co., Ltd.

PART NAME

SATA 7P SOCKET 180° ADD SPRING-2規格

DRAWING

Winky

DWG. No.

DS04

PART NO.

DS04-Pxx07Gx12SK

CHECK

Roy

REV.

A

UNIT :
mmTOLERANCE UNLESS
OTHERWISE SPECIFIEDX. X ±0.20
X. XX ±0.15
X. XXX ±0.10ANGLE
±2°

APPROVAL

John

DATE

2012. 07. 23

SCALE

1:1

PAGE

1 OF 1

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

F

E

D

C

B

A