

F

E

D

C

B

A

RoHS Compliant

SYMBOL

REV.

REVISION

APPROVAL



DATE

A

新版圖紙



Winky

2012. 09. 27

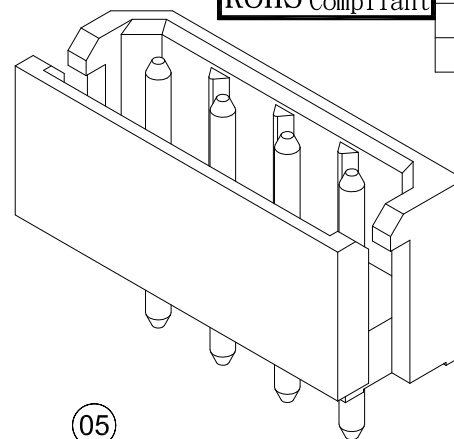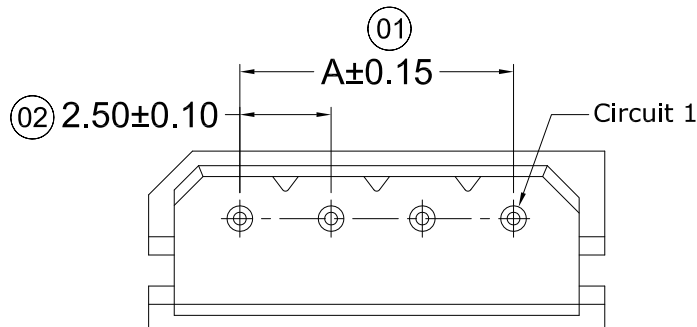

Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ
- Mark""Indicate Dimensions Need To Controlled In Emphasis

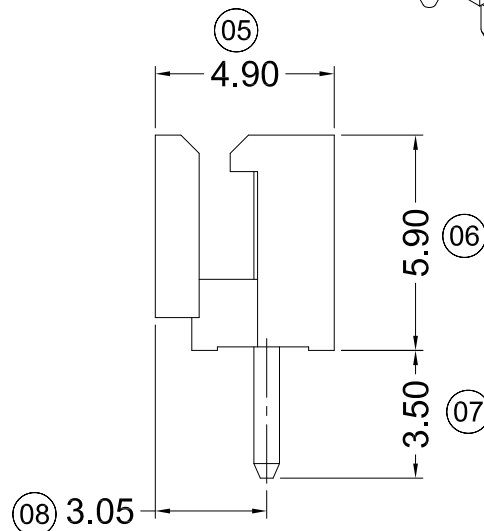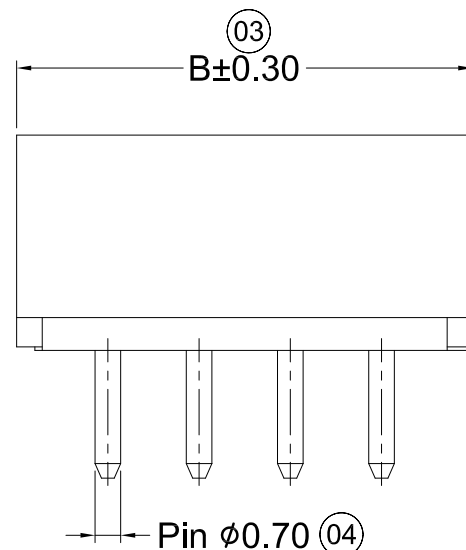

DW23 - W V I x xx GLW
① ② ③ ④ ⑤ ⑥

- ① Series No.
② Category : W:wafer
③ Welding Board Angle&Way: V: DIP, 180°
④ Material : I:PA66 94V-0
⑤ Planting Category: 0:Gold Flash 1:3u" 2:5u" 3:10u" 4:15u"
B:Bright Tin plating 70-120u"
C:Bright Tin plating 120u" MIN
M:Matte Tin plating
H:High Temperature Tin
⑥ Row No.-Pin No.: xx: 02P~16P

Poles	Dimensions (mm)	
	A	B
02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.00
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50

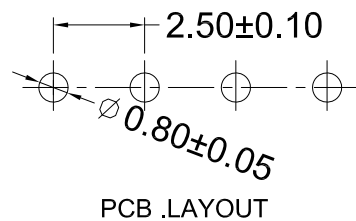

DW23-WVIBxxGLW	PA66 UL 94V-0	Brass	Tin-Plated	DW22-H	1,000Pcs
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With Housing	Q'ty/Bag

DST-conn Tech. Co., Ltd.

COPYRIGHT RESERVED, PLEASE DO NOT COPY.

PART NAME		2.50 mm Crimp Style Connector			DRAWING	Winky	DWG. No.	DW23
PART NO.		DW23-WVIxxxGLW			CHECK	Roy	REV.	A
	UNIT :	TOLERANCE UNLESS	X. X ±0.30	ANGLE	APPROVAL	John	DATE	2012. 09. 27
	mm	OTHERWISE SPECIFIED	X. XX ±0.20		SCALE	1:1	PAGE	1 OF 1
			X. XXX ±0.10					

F

E

D

C

B

A