

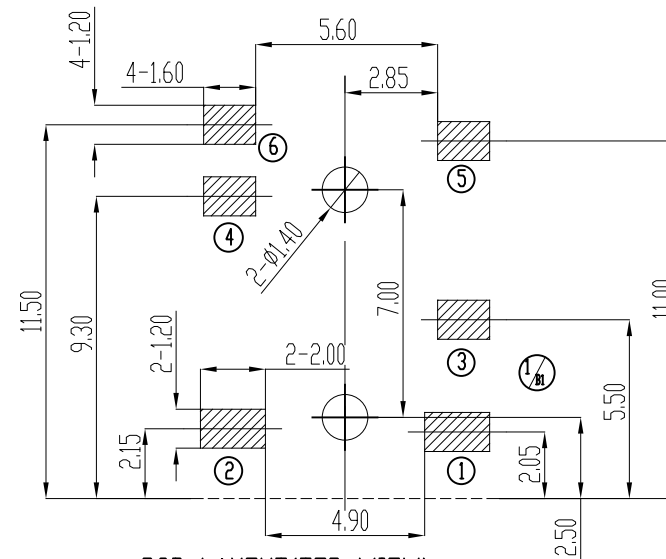
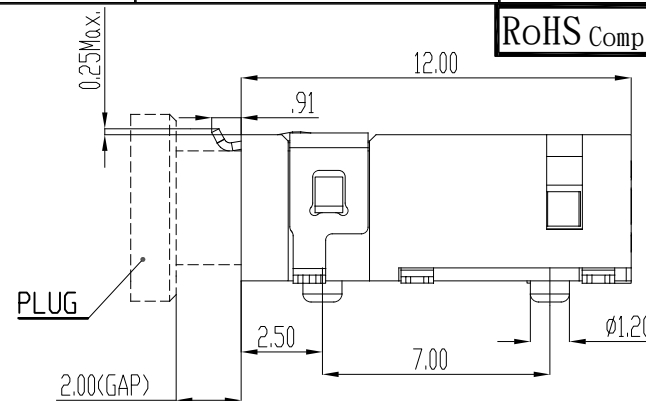


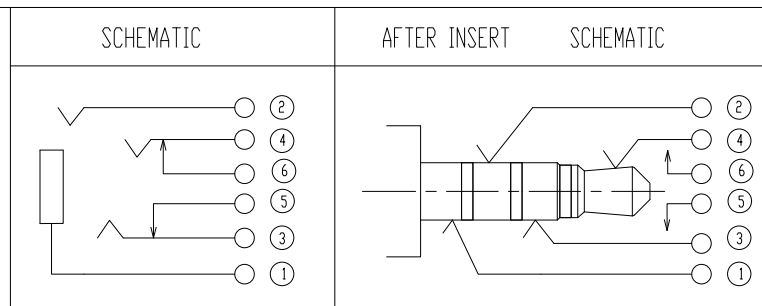

NOTES:

1. CONTACT CURRENT RATING: 12V/1A.
2. CONTACT RESISTANCE: 50 mΩ MAX.;
3. INSULATION RESISTANCE: 100MΩ MIN.;
4. DIELECTRIC WITHSTANDING: 500V AC MIN.;
5. DURABILITY: 5,000 CYCLES MIN.;
6. CONNECTOR MATING FORCES:
29.4N (3.00Kgf) MAX.;
7. CONNECTOR UNMATING FORCES:
2.94N(0.30Kgf) MIN.
8. THE PRODUCT MACHINE WITH A GAP THAT:
THE FINISHED MACHINE WITH SOCKET BEFORE/
UP/DOWN/LEFT/RIGHT SIDE OF 8, PROTECTION GAP
FIRST PROPOSED THE DESIGN OF 0.15mm.

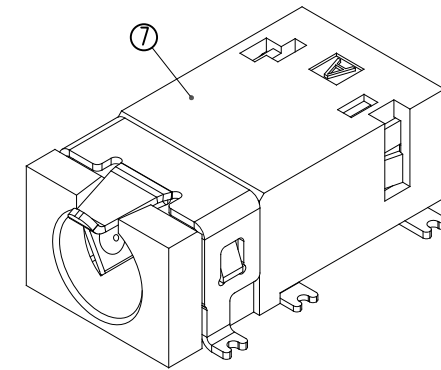

7	HOUSING	PPA	BLACK	_____
6	TERMINAL 6	COPPER ALLOY	_____	Au 1u" PLATED
5	TERMINAL 5	COPPER ALLOY	_____	Au 1u" PLATED
4	TERMINAL 4	COPPER ALLOY	_____	Au 1u" PLATED
3	TERMINAL 3	COPPER ALLOY	_____	Au 1u" PLATED
2	TERMINAL 2	COPPER ALLOY	_____	Au 1u" PLATED
1	TERMINAL 1	COPPER ALLOY	_____	Au 1u" PLATED
NO.	DESCRIPTION	MAT'L	COLOR	REMARK