


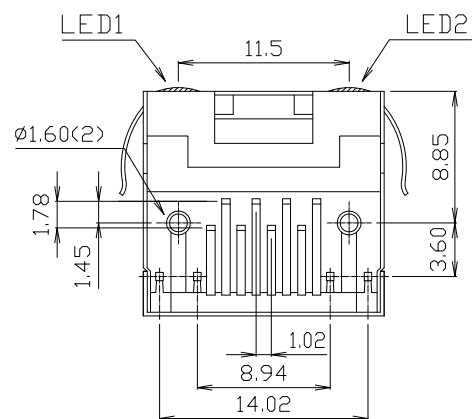
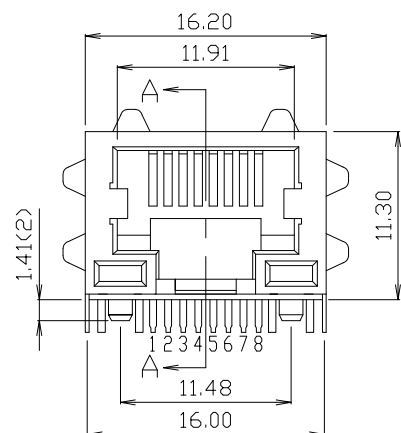



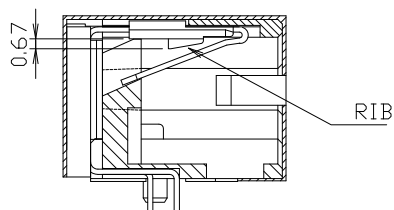

鐵殼與塑膠體
之間必須貼膠帶

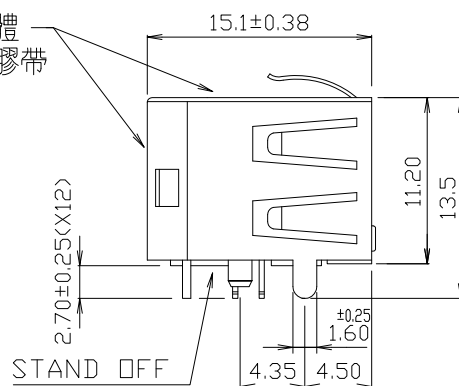

SEC A-A

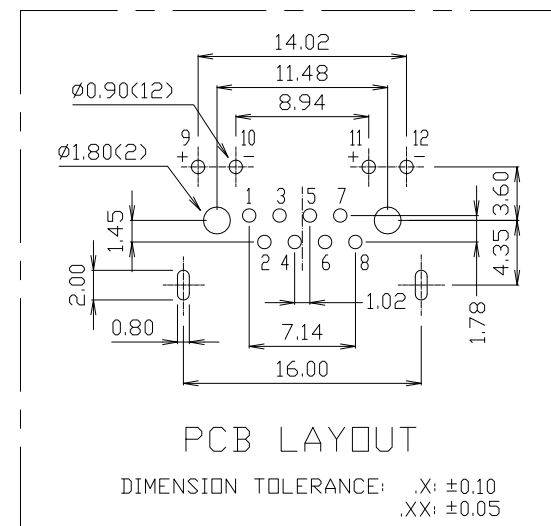

MATERIAL:

- HOUSING-DSM STANYL TE250F6
HEAT DEFLECTION TEMP.290°
BLACK COLOR, UL94V-0.
 - CONTACTS-0.35mm THICK PHOS-BRONZE PLATED
WITH HARD GOLD AND GOLD FLASH IN
SOLDER AREA.
 - SHIELD-0.25mm THICK COPPER ALLOY,
PLATED WITH NICKEL.
- CAVITY CONFIRMS TO FCC RULES AND REGULATIONS
PART 68,SUBPART F.

REV.	ECN. NO.	DRAWN	DATE
A	NEW	JOHN	26/03/2015

DST-conn Tech. Co., Ltd.



⊗:QUALITY CONTROL ITEM		GENERAL TOLERANCE		PART NO.: 11JS58D-xxxxx		
APPROVED		.X ± 0.38	X: $\pm 2^{\circ}$	TITLE:RJ45 1X1 TAB DOWN 8P8C W/ LED , SHELL , T/S		
CHECKED		.XX ± 0.25	.X $\pm 1^{\circ}$			
DRAWN		.XXX ± 0.13				
		UNIT: mm		SCALE: 1:1	SHEET: 1/1	REV.: A

說明: △ :備註 ◇ :版本變更 ④ :尺寸序號 □ :重點尺寸 ▽ :CPK尺寸

SIZE: A4